



# altro

## AltroFix™ MP600

Fast-curing multipurpose MS-Polymer sealant/adhesive

Approx. coverage: 95l/f at 3/16<sup>th</sup> bead

### Product characteristics

AltroFix MP600 is a fast curing multipurpose MS-Polymer sealant / adhesive supplied in 290ml tubes.

It has a very high initial tack on porous and non-porous surfaces that are commonly found in the construction industry. It is permanently elastic and has excellent bond and sealing properties. It is ideally suited to adhere Altro flooring, Altro Tegulis, and gulley edges, please refer to installation instructions for relevant products. It is solvent and isocyanate free.

### Handling and storage

- 1 year shelf life from date of manufacturing.
- Rotate stock to use the oldest material first.
- Store in a cool, dry place between 41°F(5°C) – 77°F(25°C).
- Application temperatures should be between 65F(18C) – 85F(29C)
- The setting and curing time is dependent upon site working temperatures:
  - Cure rate: 2.5-3mm per 24 hours at 64.4°F(18°C)
  - Should be left for 24 hrs at 64.4°F(18°C) before putting into service.

**Note: it is important to place the Altro covering in to the AltroFix MP600 within a timely fashion, no more than a 10-minute period should be exceeded.**


### Health and safety

Before using this product, users should refer to the SDS (Safety Data Sheet) for correct safety advice and to determine the level of PPE (Personal Protective Equipment) and RPE (Respiratory Protective Equipment) that is required. A COSHH (Control of Substances Hazardous to Health) assessment and risk assessment should be carried out before using this adhesive. Apply the product in well ventilated areas.

### Suitable substrates

The following properly prepared, dry, smooth, flat, dust-free substrates are approved:

- APA grade plywood
- Medium-density fiberboard (MDF)
- Metal
- Drywall/sheetrock
- Ceramic tile backer boards
- Rigid plastic
- Concrete

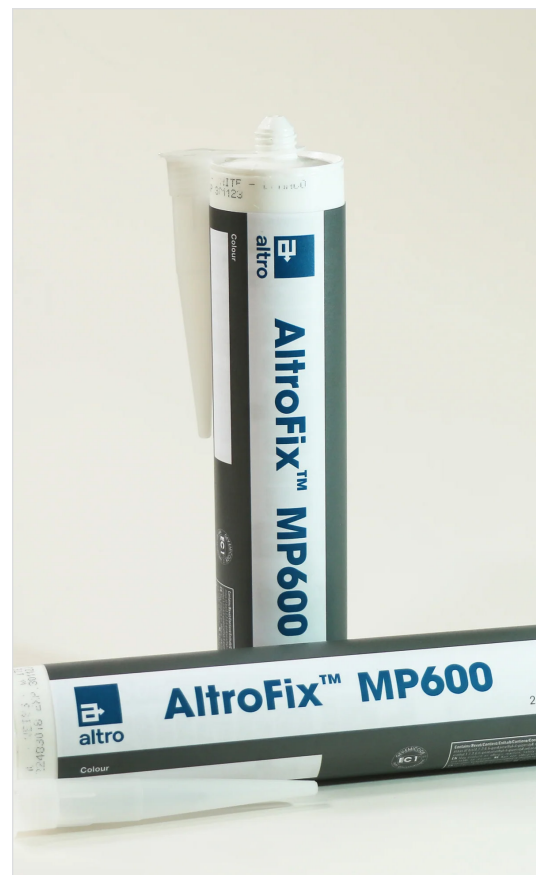

### Technical data

Chemical type	Hybrid polymer
Appearance	White paste
Shelf life	1 year, if unopened
Open time	10 minutes
Dry time	Once adhesive is dry to touch (varies on ambient temperature, humidity and coat weight)
Storage	Store between 41°F(5°C) – 77°F(25°C)



### LEED facts



LEED v4 This product may help contribute to the following credits

AltroFix MP600 **1**

Environmental quality  
Low emitting materials, adhesives **1**

Discover more of our sustainability story and credentials at [altro.com](http://altro.com)

800 377 5597 USA / 800 565 4658 CAN

support@altro.com

www.altro.com

For technical support please call and speak with our Technical Services department.