



Altro Whiterock™ FR-U



Altro Whiterock FR-U is a pressed laminate CPVC panel specifically manufactured for interior wall cladding applications in, but not limited to, pharmaceutical products and medical device production facilities where FM approved materials are required.

The Altro Whiterock FR-U panel is a durable material with impact resistance and durability. It is manufactured to withstand sporicidal cleaners as well as harsh chemical cleaning agents. Once the panels are heat-welded together, it becomes a seamless configuration.

Specially trained installers must be utilized. Please consult your local sales and technical representative extensively with all pharmaceutical applications.


- **FM approved**
- Lead-free, phthalate-free and no VOC's
- Meets Class A fire and smoke requirements
- Compatible with cleanrooms ISO Class 2 and above
- Impact and chemical-resistant

Specifications

Thickness	2.0mm (0.08")
Weight	20.5 lbs (9.3 kg) per panel
Warranty	1 year
Composition	Pressed laminate CPVC
Fire and smoke performance	ASTM E84 - 08 Class A (Surface Burning) CAN ULC 102 - Test




Color availability




White
WFR-U 190

Altro Whiterock FR-U + accessories

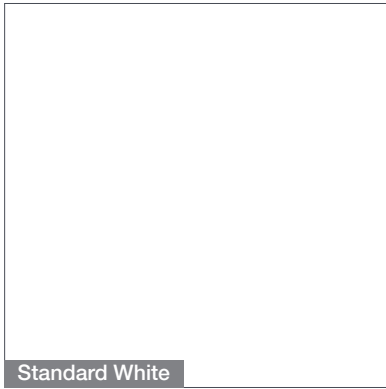

Standard White


Altro Whiterock FR-U wall cladding
WFR-U 190
CPVC, 4' x 8' x 2.0mm

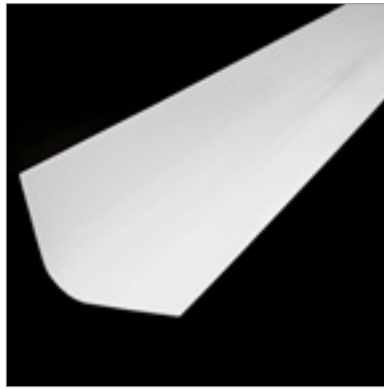


R-shape internal radius corners
A940 / 25
Installed horizontally at wall and ceiling locations (ceiling to wall cove corner) and vertically on the wall at inside corners (wall cove corner). 6" x 6" x 8'2" with 2" radius.



90° corner
A910/25 - external corner 6" x 6" x 8'2"
A920/25 - internal corner 6" x 6" x 8'2"
Installed vertically on the wall at corners.

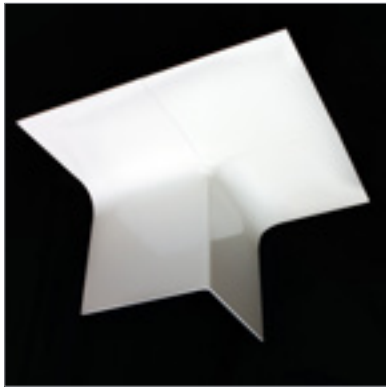

3-way external corner profile
A926
Installed at intersecting wall and ceiling outside corners. 6" x 6" with 2" radius.

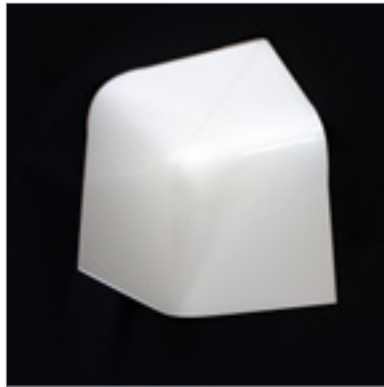

3-way internal corner profile
A921
Installed at intersecting wall and ceiling outside corners. 6" x 6" with 2" radius.



**3 way internal corner w/
one 90° corner profile**
A922
Installed at intersecting wall and ceiling inside corners. 6"x6" with 2" radius.



Double-sided tape
A847
25/32" x 32" double-sided tape.



AltroFix WFR47 adhesive
WFR47
Silicone adhesive caulk
11fl oz per cartridge.



Weldrod
WSR500
1000' heat welding rod