



altro


Designed for possibilities.
Made for people.



System accessories for Altro flooring

Items for a complete flooring installation with Altro flooring products.

Depicts colors available

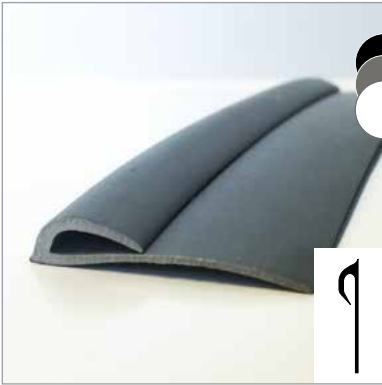

C7 Cap strip

C7BLK/DOVE/WHT

Pliable "J" shaped vinyl finishing cap used with flash covered sheet vinyl flooring. Available in Black, Gray and White.



20mm Cove stick

CF 20R


Used to create flash coving with resilient sheet flooring.



38mm Cove stick

CF 38R

Used to create flash coving with resilient sheet flooring.

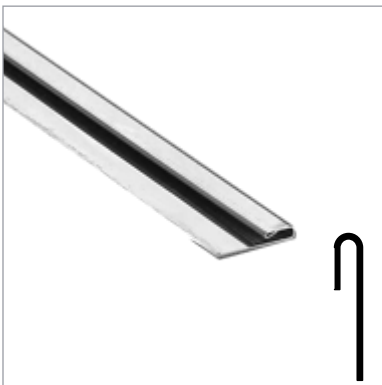

Stainless steel cap strip

SSCAP67

Stainless steel "J" shape finishing cap used with flash cove sheet vinyl flooring. Finish: 304 #4 stainless steel finish Gauge: 20



Stainless steel corner guard

3" and 5"


Protects external corners in high traffic areas.



C11 Captile strip

C11


Pliable vinyl finishing cap used at the top of quarry tile base or similar when flash coving over existing tile.

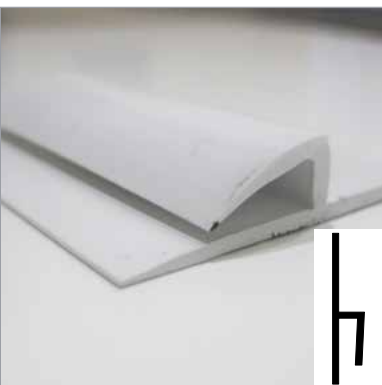

C8 Cap tile strip

C8


Rigid "h" shaped vinyl transition cap w/8mm shelf to be used between flash covered sheet flooring and wall tiles and/or wall cladding.

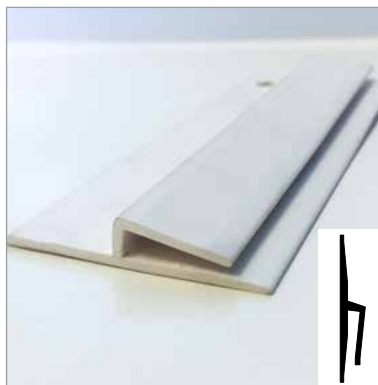

C4 Cap tile strip

C4Cap


Pliable "h" shaped vinyl transition cap w/4mm shelf to be used between flash covered sheet flooring and Altro wall panels.

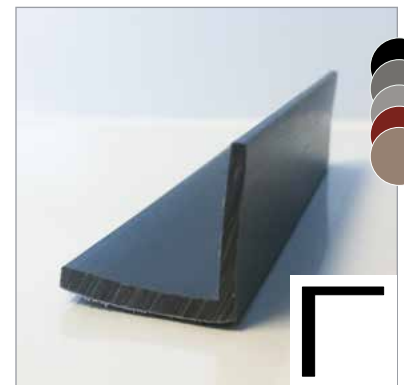

Gully angle

GA 25/35


Vinyl "L" shaped accessory to be heat welded to sheet vinyl and used with raised floor sinks that are higher than the finished floor level. Available in Black, Storm (Dark Gray), Fog (Light Gray), Russet (Quarry Red) and Tundra.

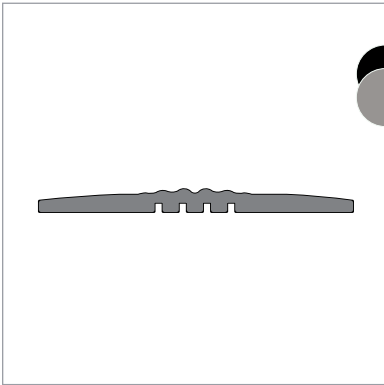

50mm Joint cover strip

QCJ50 (2" x 49')


Cover strip used when there is potential of control joints moving and showing through the finished floor.

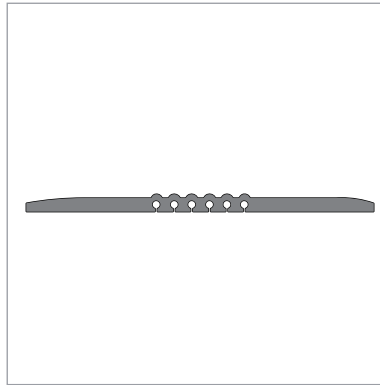

75mm Joint cover strip

QCJ75 (3" x 49')


Cover strip used when there is potential of control joints moving and showing through the finished floor.

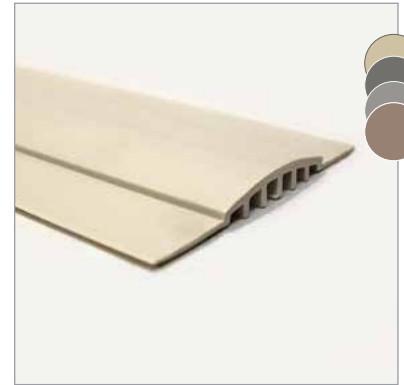

Shower transition trim

ASF WETTRIM/* color code


Wheel chair accessible shower berm that prevents water egress from wet areas. Available in Cream(01), Light Gray(03), Medium Gray(04) and Light Brown (02).

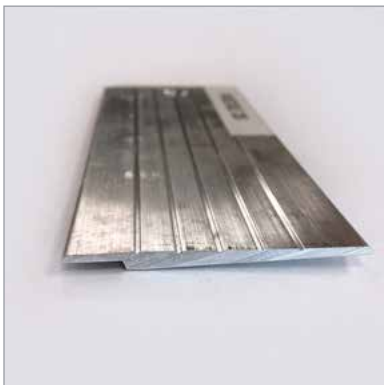

Visedge DS

VISEGE DS

Aluminum over the top reducer threshold to finish a raw edge of flooring where it needs to transition down to zero.

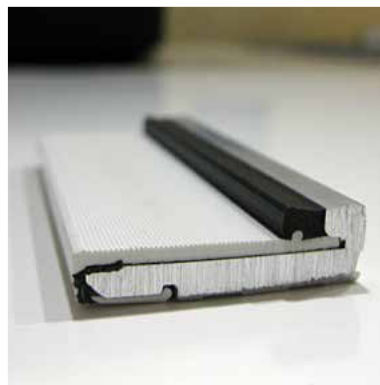

Visedge VR

VISEGE VR


Aluminum alloy retainer with pvc insert to receive heat welded sheet vinyl that can abut a raised floor sink or quarry tile and patched down to zero.



Stainless steel heat deflector plate

SS DEFLECTOR PLATE


Protects vinyl flooring from high radiant heat. Ships with protective film covering. Size: 4'3

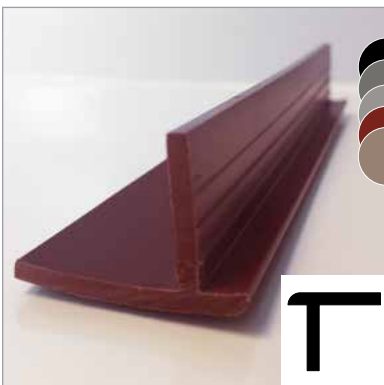

20mm Gulley edge with reducer

GE 25 RE


Vinyl "T" shaped accessory to be heat welded to sheet vinyl and used with floor sinks, square or rectangular trench drains that are flush with the finished floor level. Available in Black, Storm (Dark Gray), Fog (Light Gray), Russet (Quarry Red) and Tundra.

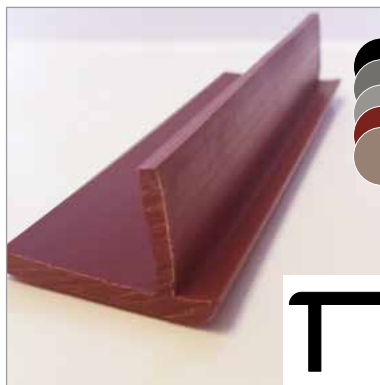

35mm Gulley edge with reducer

GE 35 RE

Vinyl "T" shaped accessory to be heat welded to sheet vinyl and used with floor sinks, square or rectangular trench drains that are flush with the finished floor level. Available in Black, Storm (Dark Gray), Fog (Light Gray), Russet (Quarry Red) and Tundra.

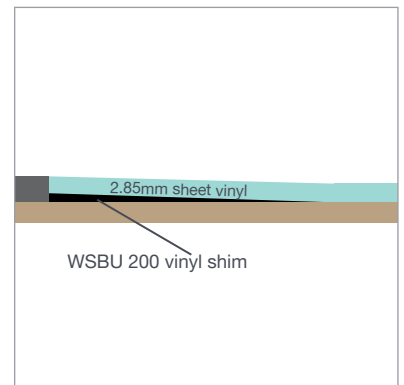

WSBU 200 vinyl shim

WSBU200

Vinyl shim use for transitioning smoothly between floors and walls or dissimilar flooring thickness when the transition is to be heat welded.



EcoFix 20E adhesive

ECOFIX20E

Environmentally friendly, hard set, acrylic adhesive used for vinyl sheet flooring.



EcoFix 25E adhesive

ECOFIX25E

Environmentally friendly, pressure sensitive, acrylic adhesive used for tile and/or plank flooring.



AltroFix 30 adhesive

ALTROFIX30

Two-part polyurethane adhesive used for installing safety sheet vinyl in high traffic and/or wet areas.



AltroFix 31 adhesive

ALTROFIX31

Fast-acting two-part polyurethane adhesive used for installing safety sheet vinyl in small, wet environments.



AltroFix SD70 acrylic adhesive

ALTROFIXSD70

One-part acrylic adhesive used for installing Altro Walkway 20SD in static sensitive areas.



Adhesive for recycled rubber flooring

RFA4.0

One-part polyurethane adhesive used for installing Altro Ollero.



EcoFix 65 Spray adhesive

ECOFIX65

Non-toxic, water-based adhesive used for tile and/or plank flooring.



EcoFix 35 Spray adhesive

ECOFIX35

Non-toxic, water-based adhesive used for resilient sheet vinyl flooring in dry environments.



Altro QuickFix 3042 epoxy caulking

QUICKFIX3042

Fast-reacting, two-part self-mix epoxy caulking adhesive used for gully edge/angle installation and small repairs.



W165 Tape adhesion promoter

W165
Ensures tape adheres properly to substrate.



AltroMastic 100

A1M/* add color code.
Caulking compound used for sealing joints where obstructions prevent the use of a heat welding gun.



Weldrod

WR* add color code.
PVC welding rod for use with Altro sheet vinyl flooring.



Adhesive-free tape

XL Tape 25
For adhering adhesive-free sheet vinyl in place.




Contact tape

1" CFS Capfix
4" and 6" CFS Covefix
Adheres cove stick and flashed covered flooring in place.



Altro Everlay underlayment

MEA1.2
For installing sheet vinyl over old or new surfaces with subfloor problems.

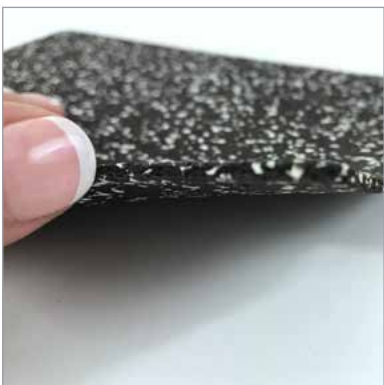

Altro Acoustic underlay 1101

AAU1101L36
For reducing the passage and transmission of sound.



FlashCove

FLASHCOVE* add Small toe/Large toe
Prefabricated, coved base with a bonded aluminum reinforcing backer.



Altro Drain strainer cover

ADSC-5Z (5" fit Zurn)
ADSC-5MW (5" fit Mifab/Watts)
For ease in creating a modified drain with pre-existing assemblies.