






Designed for possibilities.  
Made for people.

# Altro Whiterock™ Textured

Textured wall protection for busy spaces.

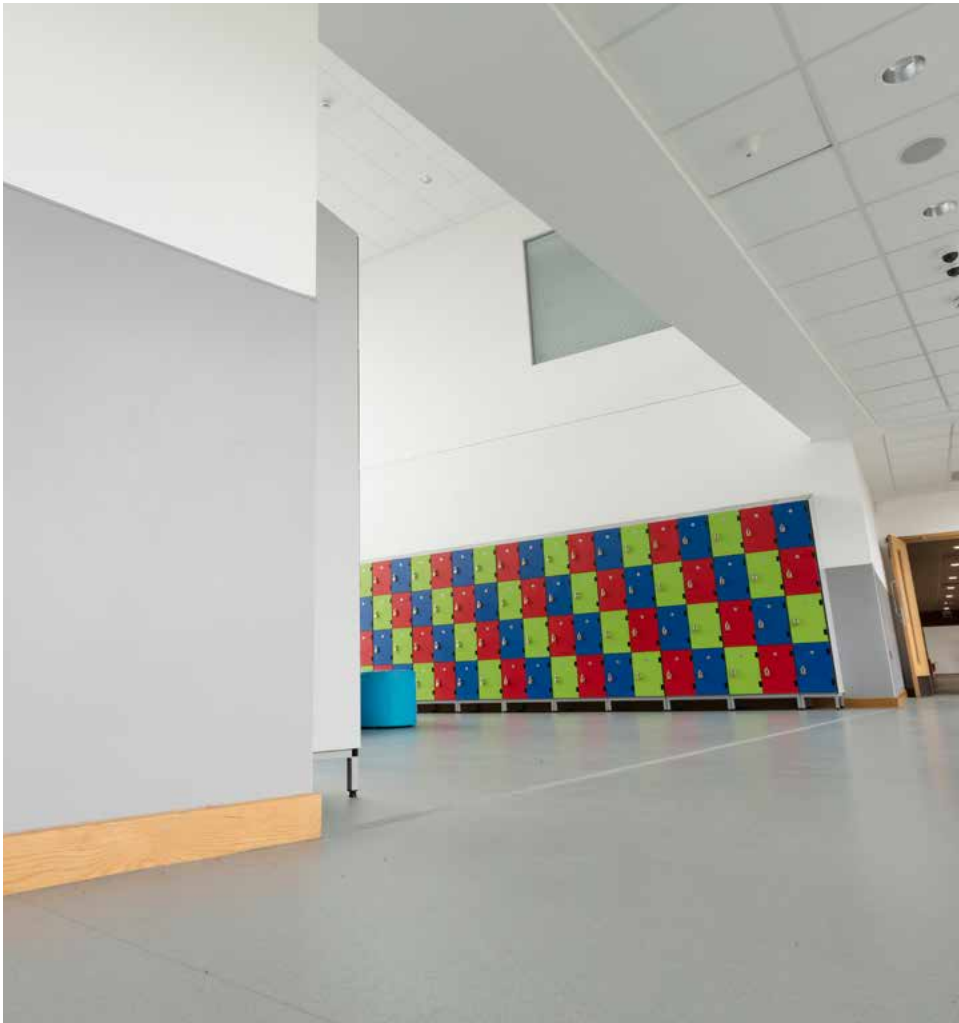


2.5mm  
thick

4'  
width


9'10"  
length

panel  
format




**Almond**  
FT32

LRV 70



**Battleship**  
FT208

LRV 43



**Pearl**  
FT41

LRV 83



**Tan**  
FT206

LRV 41




Light reflectance values (LRV)

Please keep LRVs in mind when selecting walling for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.





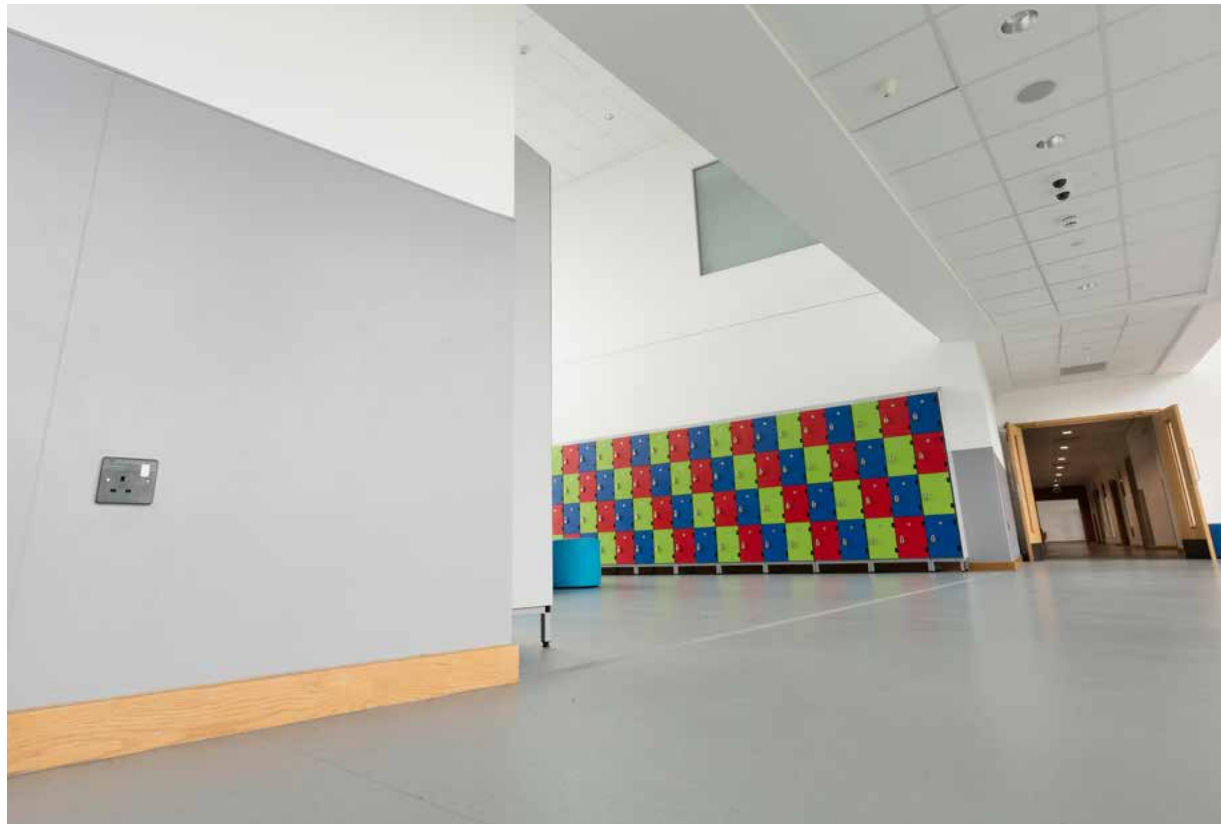





Request a sample at [altro.com/samples](https://altro.com/samples) or  
800.377.5597 (USA) 800.565.4658 (CAN)



# Altro Whiterock Textured

Textured wall protection for busy spaces.

Thickness	2.5mm   .10"			Altro Whiterock is USDA compliant	
Dimensions	10' - 4' x 9' 10"   1.22m x 3.0m			Altro Whiterock is FDA compliant	
Weight	10' panel - 28.22 lbs   12.8 kg			Altro Whiterock conforms to the hygienic standards of USP 797	
Warranty		20 years		Altro Whiterock is CFIA compliant	
Fire and smoke performance	CAN/ULC-S102.1 ASTM E84-08	Tested Class A		HACCP International certified	
Impact Resistance	ASTM D5420	Exceeds 160 inch lbs	Density (g/cm3)	ISO 1183	1.39
VOC emissions	CA 01350	Pass	Flexural strength (Mpa)	ISO 178	79.8
Particle concentration	ISO 14644-1:12	Meets ISO Class 2 cleanroom	Shore hardness, Type D	ISO 868	79
Max service temperature	140°F (60°C)		Volume resistance RD (Ω)	DIN IEC 60 093	6.90E+13
Tensile strength (Mpa)	ISO 527	48	Dielectric constant	DIN 53483	3.2
Surface resistance ROE (Ω)	DIN IEC 60 167	2.00E +14	Thermal conductivity - "K Value" (W/mK)	DIN 52612	0.16
Dielectric strength (KV/mm)	DIN IEC 243	16.8	Coefficient of linear thermal expansion	DIN 53752	7.10-5 at 68°F (20°C) after 1 hr storage at 194°F (90°C) (104/K)
Dielectric loss index	DIN 53483	0.02	Vicat softening point VST/B	ISO 306	176°F (80°C)
"U Value" bonded to 100mm block wall (W/m <sup>2</sup> °C)	DIN 52612	1.8	Heat distortion temperature	ISO 75-2	140°F (60°C)
Compressive strength (N/mm <sup>2</sup> )	DIN 53454	70	Water absorption	ISO 62	24 hrs - .030% 168 hrs - .093% 216 hours - .106%
Water absorption	ISO 62	24 hrs - .030% 168 hrs - .093% 216 hours - .106%		Fungi resistance ASTM G21	Passes rating 0* *achieves zero growth after 21 days
	Mold resistance ASTM D3273	Excellent Score of 10			
UV exposure	ASTM G154		Tested		
Composition	Extruded semi-rigid virgin PVCu with a tight molecular structure and incorporated UV stabilizers.				
Installation	Must be installed by a professional installer that has attended the Altro Whiterock Installation Clinic. Installation procedures must follow the instructions detailed in the Altro Whiterock Installation Guide. Failure to install using the complete Altro Whiterock System could void the limited product warranty.				

Altro and Altro Whiterock are trademarks of Altro Limited. Book content was correct at time of print. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.

© Copyright Altro USA 2019


## LEED facts




LEED v4

This product may help contribute to the following credits

Altro Whiterock Textured **2**

 Environmental quality  
Low emitting materials, walls **1**

 Environmental quality  
Low emitting materials, adhesives **1**

Discover more of our sustainability story and credentials at [altro.com/sustainability](http://altro.com/sustainability)

