



altro

the future is safer with altro

Installation techniques and detailing


Self-coved to architrave

November 2016

For locations where a flush finish with no exposed edges is required to an upright such as a door architrave, a CF38R / CF20R radius cove former should be trimmed diagonally back from approx. 200mm – 300mm to a point, then fitted to the junction of the wall and floor. The Altro sheet flooring should be coved over this section up to a minimum height of 100mm

and finished into the required finishing strip. The cove former, Altro flooring and finishing strip (if appropriate) used in this section must be adhered with a suitable contact adhesive. All mitres and joints within the coving must be hot welded.

Drawing Ref. D9/03/05

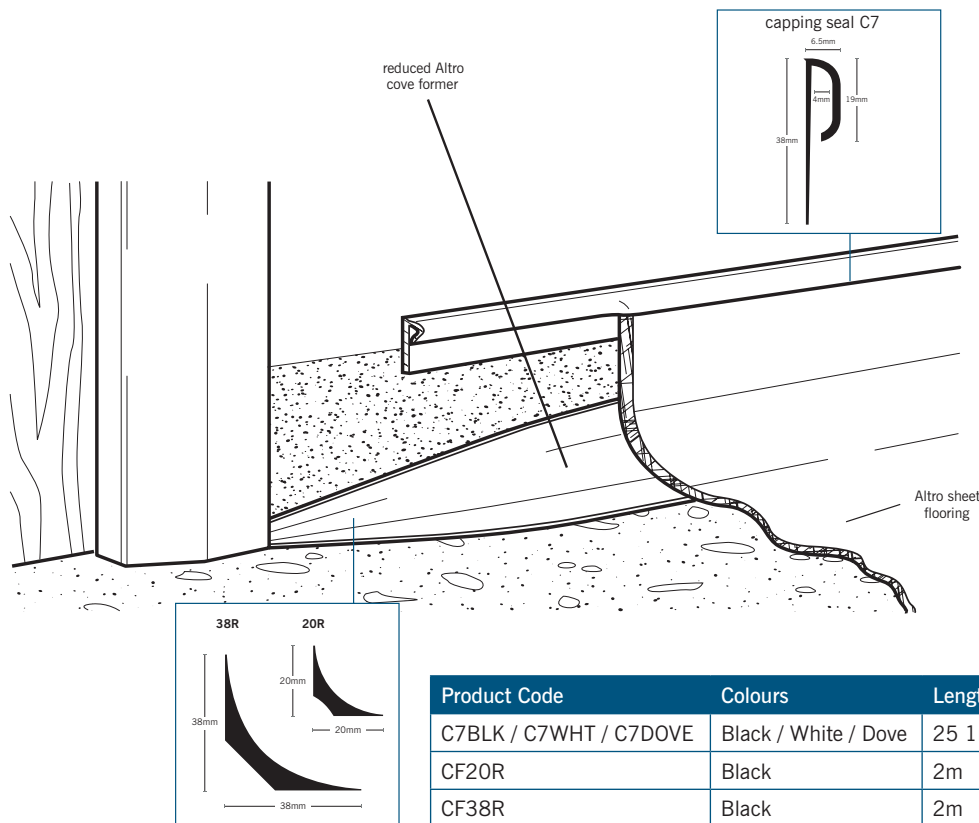

Product Code	Colours	Length
C7BLK / C7WHT / C7DOVE	Black / White / Dove	25 1m coil
CF20R	Black	2m
CF38R	Black	2m

For further information or technical advice
tel: 01462 707604 fax: 01462 707515
email: enquiries@altro.com or www.altro.com