



# Stain and chemical resistance guide

## Altro ShieldTec 3rd party testing


### Independent 3rd party laboratory results

Test method: ASTM F925 (Regular) Standard Test Method for Resistance to Chemicals of Resilient Flooring


Staining agent	5 minute ratings			24 hour ratings		
	Surface Dulling	Surface Attack	Color Change	Surface Dulling	Surface Attack	Color Change
Betadine	0	0	0	0	0	0
5% Acetic Acid	0	0	0	0	0	0
70% Isopropyl Alcohol	0	0	0	0	0	0
Mineral Oil	0	0	0	0	0	0
5% Sodium Hydroxide	0	0	0	0	0	0
5% Hydrochloric Acid	0	0	0	0	0	0
5% Ammonia	0	0	0	0	0	0
Bleach	0	0	0	0	0	0
5% Phenol	0	0	0	0	0	0
Gasoline	0	0	0	0	0	0
Sulfuric Acid	0	0	2	0	0	2
Kerosene	0	0	0	0	0	0
Olive Oil	0	0	0	0	0	0
PeridoxRTU®	0	0	0	0	0	0

0 = No Change, 1 = Slight Change, 2 = Modern Change, 3 = Severe Change


### Colors tested (dark, mid-tone, light)

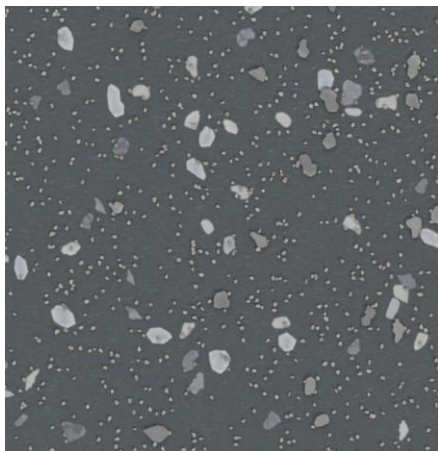

Cardoon

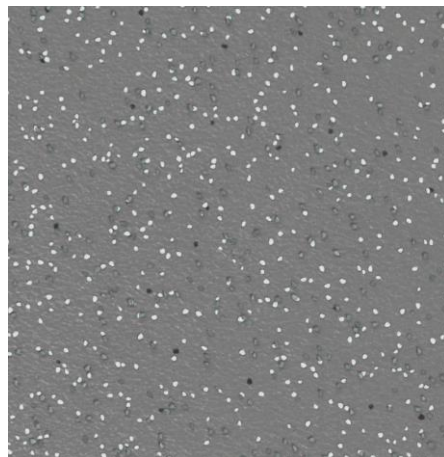

Agave

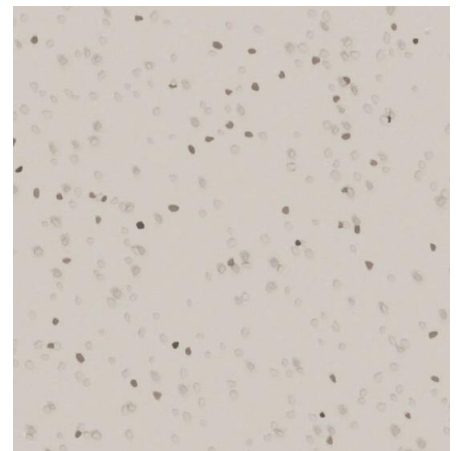

Pampas

Test reports available by request.