



Altro Serenade™ product datasheet

Acoustic backed, high design smooth sheet flooring for commercial applications

Altro Serenade

Silence is golden. Whether softening the sounds of little feet or maximizing privacy at work or leisure, acoustic Altro Serenade is more than up to the task.

At 3.9mm thick with 19dB impact sound insulation and an IIC rating of 52, not only does it reduce noise, it provides a high level of comfort underfoot, making it a great solution for well-used spaces.

Combine with our extensive range of Altro wall panels for an attractive and durable floor and wall system.

Altro Serenade also looks great paired with Altro Wood, Altro Orchestra or even Altro Operetta.

Typical applications

Healthcare, senior living, education, retail, offices, light gym and recreational areas

Features + benefits

- Smooth surface is easy to clean and maintain
- Provides ample comfort underfoot
- 19dB sound reduction and an IIC rating of 54
- Colors coordinate with Altro Orchestra and Altro Operetta ranges for a complete look throughout
- FloorScore Certified / Low VOCs

Better together

Smooth flooring from Altro gives you what you want - an economical and attractive look that's easy to install and maintain. But, in commercial areas with frequent spillages and hygiene and durability concerns, it's best to let our robust collection of safety flooring, slip-resistant flooring and wall cladding join the team!

Install smooth flooring in the dining room and public areas, and bring safety flooring and wall protection into the kitchen, bar and restrooms. You will rest easy knowing your patrons will have an exquisite experience while the most dangerous areas in your facility are well equipped to handle the tolls of the day.

We strongly recommend carrying out a risk assessment in any area in which the installation of smooth flooring is considered, focusing on the potential risk posed by contaminants.

Altro Easyclean Technology



Rather than using a superficial surface coat, Altro Easyclean Technology is incorporated into the flooring while it is manufactured. This allows Altro flooring to benefit from enhanced cleaning and maintenance while still allowing our products' slip-resistant properties to shine through.

Smooth flooring will have a higher level of Altro Easyclean than a slip-resistant or safety floor.

- Industry-leading ease of cleaning
- Enhanced long-term cleanability
- Cleaning and maintenance cost savings
- Sustained long-term slip resistance
- Exceptional long-term durability
- Low dirt pick-up qualities
- Improved color retention

3.9mm
thick


6'7"
width

65'5"
length

sheet
format









Bandola
WR485

SE3945U
LRV 8




Romeo
WR496

SE3952U
LRV 49




Bohemia
WR483

SE3942U
LRV 44




Bolero
WR502

SE3959U
LRV 23




Elgar
WR494

SE3962U
LRV 23




Torch
WR513

SE3974U
LRV 39




Encore
WR450

SE3929U
LRV 24




March
WR446

SE3925U
LRV 37




Metronome
WR435

SE3914U
LRV 26




Octave
WR436

SE3915U
LRV 17




Adagio
WR456

SE3935U
LRV 34




Chord
WR455

SE3934U
LRV 31



Anthem
WR454

SE3933U
LRV 22

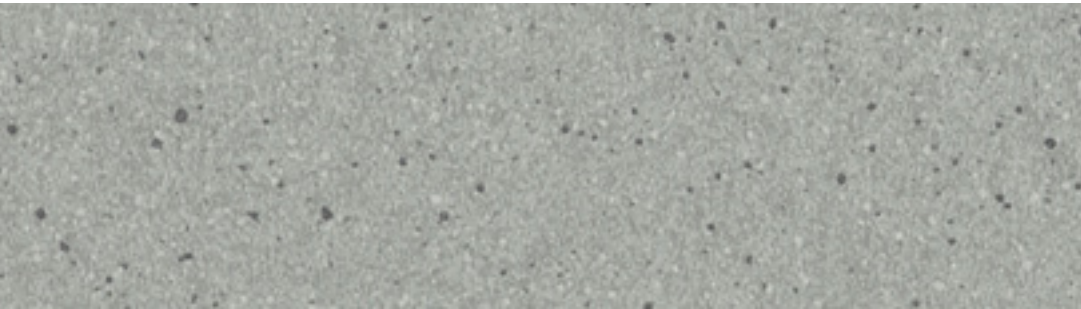

Caldara
WR460

SE3939U
LRV 39

i Color matched weldrods (WR) and mastics are available. You'll find weldrod product codes under product SKUs. Mastics can be found by scanning this QR code.





Specifications			
Type + class		ASTM F1303	Type I, Grade 1, Class C, smooth flooring
Thickness and wear layer		3.9mm .15" / .7mm / 28 mil wear layer, heterogeneous construction	
Roll dimensions		6'7" x 65'5" 2m x 20m	
Weight		5.34 lbs./yd ² 2.9 kg/m ² 260 lbs. per roll	
Warranty		10 years	
Life expectancy		15 years	
Cleaning technology		Altro Easyclean	
Static coefficient of friction		ASTM D2047	.7 dry, .8 wet
Dynamic coefficient of friction		ANSI/NFSI B101.3	.49 wet DCOF
Ramp test		EN 16165	R10
Static load limit		ASTM F970	500 psi
Indentation		EN ISO 24343	≤ 0.20mm
Wear (abrasion) resistance		EN 660-2	Group T
Castor chair abrasion		ISO 4918	Yes, Type W
Flexibility		EN ISO 24344	Pass
Light fastness		EN 105-B02	≥ 6
Sound insulation		ISO 10140	19dB
		ASTM E492 Impact insulation test	Concrete slab STC 52 / IIC 52 Suspended ceiling STC 62 / IIC 65
Electrical behaviors		EN 1815	≤ 2kV Antistatic
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
Mold resistance		ASTM D3273	Tested
Fungi resistance		ASTM G21	Tested
Chemical resistance		ASTM F925	Tested
VOC emissions		CA 01350 FloorScore	Pass Certified
Bio-based content		Manufactured with rapidly renewable bio-based content.	
Ortho-phthalate content		Ortho-phthalate-free	
Composition	Heterogeneous PVC with glass fiber reinforcement scrim between the film print and backing. Altro Easyclean incorporated into top layer for exceptional cleanability.		
Backing	Blown PVC backing.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.		
Altro, Altro Serenade and Altro Easyclean are all trademarks of Altro Limited. Content was correct at time of creation. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information. © Copyright Altro USA 2026			





LEED v5 This product may help contribute to the following credits

Altro Serenade


Quantify and assess embodied carbon
Materials and resources, MRp2

Reduce embodied carbon
Materials and resources, MRc2

Low-emitting materials
Materials and resources, MRc3

Building product select and procurement
Materials and resources, MRc4

Discover more of our sustainability story and credentials at altro.com

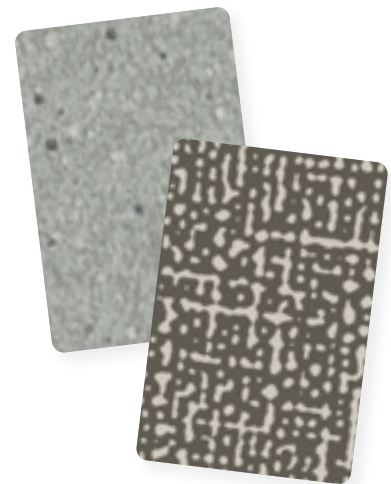

Order samples 24 hours a day at altro.com and materialbank.com

Discover more online!



Maintenance guides




Illus. cleaning guides



Warranty forms



Literature



LEED forms



Installation guides



Installation quickfacts

Even more great resources!

- BIM components
- SDS sheets
- Detail drawings and CAD files
- High-resolution swatch downloads
- Photo galleries - www.altropics.com
- Solutions by area type - ORs, labs and cleanrooms, kitchens, senior living and more!

Follow us



📞 USA 800 377 5597

📞 CANADA 800 565 4658

✉ support@altro.com

🌐 www.altro.com

Content was correct at time of print. Altro reserves the right to change any detail. Please consult www.altro.com or your local Sales Representative for the latest product information.