

# **Altro Wood**

This attractive, general purpose 2mm wood-look flooring is available in a range of designs with different plank sizes and shades, including a fine-line design, a classic wide plank and rustic designs, helping you create the right look for areas where people live and work.

It's not just about looks though: Altro Wood is designed to cope with the medium to heavy traffic you would expect in these environments. It is also a perfect partner for a variety of wall shades and finishes, from wall cladding to metal and glass, making design simpler.

With matching design and color options across this range and two other wood-look ranges, you can achieve a consistent look in different areas with the ability to choose between ranges for the right technical performance according to the area.

Altro Wood also looks great paired with Altro Wood Comfort, Altro Wood Acoustic, Altro Wood adhesive-free, Altro Operetta or even Altro Symphonia.

## Typical applications

Healthcare, senior living, education, retail, offices, light gym and recreational areas

#### Features + benefits

- Authentic wood visual creates warm and inviting setting
- Impressive range of designs with different planks and shades available
- Resists up to 2,500 psi indentation
- Allows coordination with Altro Wood Comfort, Altro Wood Acoustic and Altro Wood adhesive-free ranges for smooth transition between areas requiring different levels of slip resistance and sound absorption
- FloorScore Certified / Low VOCs

## Better together

Smooth flooring from Altro gives you what you want - an economical and attractive look that's easy to install and maintain. But, in commercial areas with frequent spillages and hygiene and durability concerns, it's best to let our robust collection of safety flooring, slip-resistant flooring and wall cladding join the team!

Install smooth flooring in the dining room and public areas, and bring safety flooring and wall protection into the kitchen, bar and restrooms. You will rest easy knowing your patrons will have an exquisite experience while the most dangerous areas in your facility are well equipped to handle the tolls of the day.

We strongly recommend carrying out a risk assessment in any area in which the installation of smooth flooring is considered, focusing on the potential risk posed by contaminants.

# Altro Easyclean Technology EASYCLEAN



Rather than using a superficial surface coat, Altro Easyclean Technology is incorporated into the flooring while it is manufactured. This allows Altro flooring to benefit from enhanced cleaning and maintenance while still allowing our products' slip-resistant properties to shine through.

Smooth flooring will have a higher level of Altro Easyclean than a slip-resistant or safety floor.

- Industry-leading ease of cleaning
- Enhanced long-term cleanability
- Cleaning and maintenance cost savings
- Sustained long-term slip resistance
- Exceptional long-term durability
- Low dirt pick-up qualities
- Improved color retention













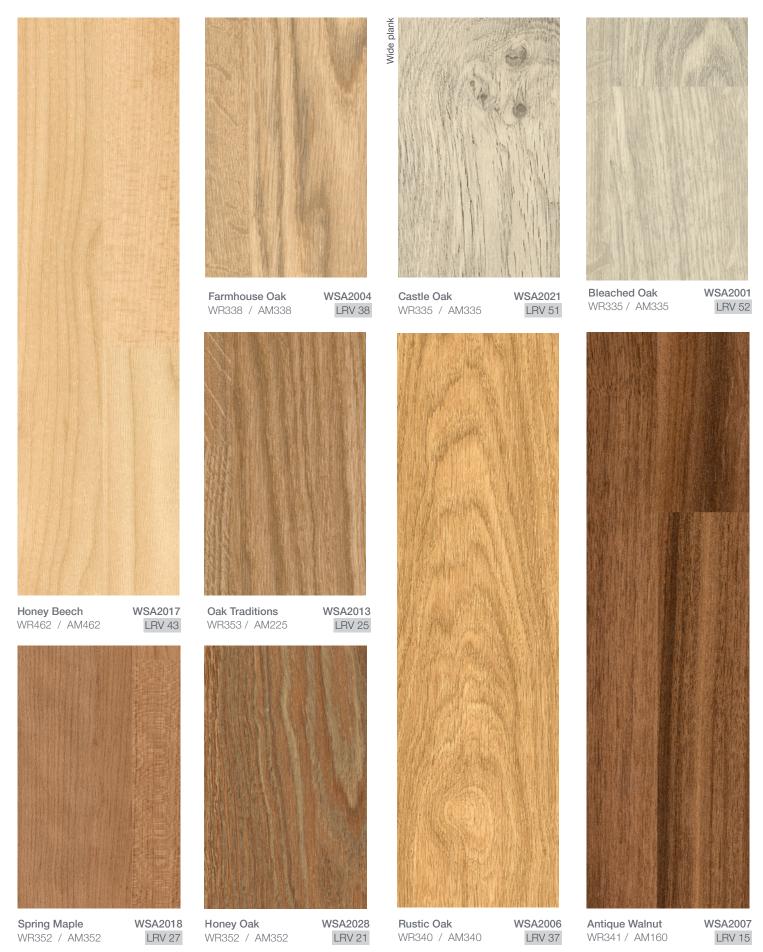



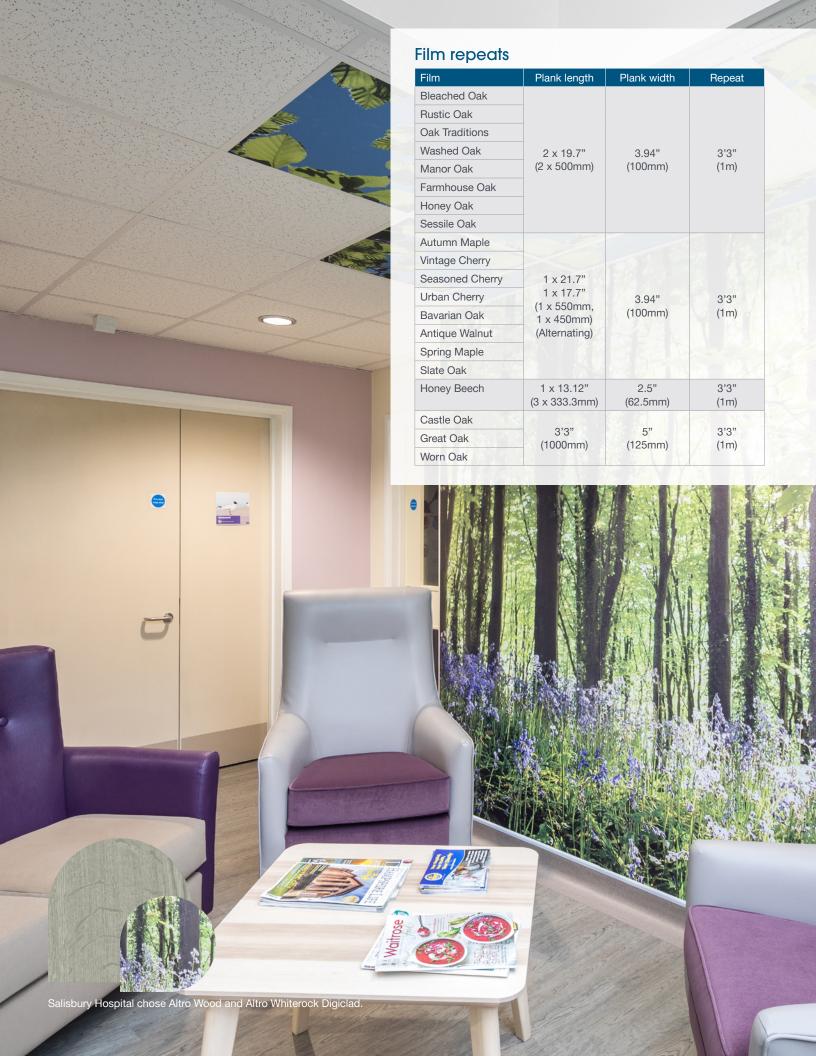


Type + class		ASTM F1303	Type I, Grade 1, Class B, smooth flooring	
Thickness and wear layer		2.0mm   .08" / .7mm / 28 mil wear layer, heterogeneous construction		
Roll dimensions		6'7" x 65'5"   2m x 20m		
Weight		4.90 lbs./yd   2.66 kg/m   235 lbs. per roll		
Warranty	10 year product warnety	10 years		
Life expectancy	15 year	15 years		
Cleaning technology	EASYCLEAN"	Altro Easyclean		
Static coefficient of friction	.79D .94W SCOF	ASTM D2047	.79 dry, .94 wet	
Dynamic coefficient of friction	.49 DCOF	ANSI/NFSI B101.3	.49 wet DCOF	
Ramp test	$R_{10}$	DIN 51130	R10	
TRRL pendulum test	PTV ≥36	BS 7976	36+	
Static load limit	<u> </u>	ASTM F970	2500 psi	
Indentation		EN 433	≤ 0.10mm	
Wear (abrasion) resistance		EN 660	≤ 10% 50,000 cycles	
Castor chair abrasion		EN 425	Pass	
Flexibility		ASTM F137	Pass	
Light fastness	<b>7</b>	EN 20105-B02	≥ 6	
Sound insulation	((©	ISO 140-8	4dB	
Electrical behaviors	27Å •2,0 kV	EN 1815	≤ 2kV Antistatic	
Fire and smoke performance	8	CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450	
Mold resistance	*	ASTM D3273	Excellent - Score of 10	
Fungi resistance	7	ASTM G21	Passes rating 0* *achieves zero growth after 28 days	
Chemical resistance	<b>*</b>	ASTM F925	Tested	
VOC emissions	floor	CA 01350 FloorScore	Pass Certified	
Bio-based content	bo-based content	Manufactured with rapidly renewable bio-based content.		
Ortho-phthalate content	di introdutol-tiese	Ortho-phthalate-free		
Composition		with glass fiber reinforcement scrim between the film print and backing. porated into top layer for exceptional cleanability.		
Backing	Compact PVC backing.			
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.			

Altro, Altro Wood and Altro Easyclean are all trademarks of Altro Limited. Content was correct at time of creation.

Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.

© Copyright Altro USA 2024



Discover more of our sustainability story and credentials at altro.com





Order samples 24 hours a day at altro.com and materialbank.com

#### Discover more online!



Maintenance guides



Illus. cleaning guides



Warranty forms



Literature



LEED forms



Installation guides



Installation quickfacts

## Even more great resources!

- BIM components
- SDS sheets
- Detail drawings and CAD files
- High-resolution swatch downloads
- Photo galleries www.altropics.com
- Solutions by area type ORs, labs and cleanrooms, kitchens, senior living and more!

### Follow us



- **USA** 800 377 5597
- **♥ CANADA** 800 565 4658
- www.altro.com

Content was correct at time of print. Altro reserves the right to change any detail. Please consult www.altro.com or your local Sales Representative for the latest product information