



Designed for possibilities.  
Made for people.



# Altro Stronghold™ 30 product datasheet

Aggressive safety flooring designed to minimize risk in wet and greasy areas

# Altro Stronghold 30

Navigating a slippery surface is challenging enough, but add grease, oils, and fats, and it becomes a hazard. In commercial kitchens and food preparation areas, choosing the right flooring is crucial for maintaining a safe working environment.

Altro Stronghold 30 offers the highest slip resistance rating from Altro, ensuring maximum safety in wet and greasy conditions throughout its lifetime. Not only does it protect staff from slips, but its 3mm thickness also reduces fatigue by providing excellent noise reduction and comfort underfoot.

Altro Stronghold 30 is often paired with Altro Puraguard wall protection to create durable and secure spaces in commercial and industrial kitchens. For front-of-house areas, it complements beautifully with Altro Wood, Altro Illustra, or Altro Lavencia LVT, adding both safety and style.

## Typical applications

Commercial kitchens, food preparation, back-of-house service areas, walk-in coolers and freezers

## Features + benefits

- Achieves highest level of slip resistance
- Risk of slipping is 1 in a million even with contaminants present
- Static load limit exceed 2000psi
- FloorScore Certified / Low VOCs
- -22F / -30C lowest temperature rating
- Installs faster than quarry tile and epoxy
- Independent Halo tests indicate 10x lower bacteria count than quarry tile
- Fungi-resistant, achieves zero growth after 21 days
- ICC-ES Product Certified
- This product does not contain PFAs

## Slip resistance



It is designers, specifiers and end users' responsibility to ensure flooring is fit for purpose, and it's part of our role here at Altro to help make this process easy. Our flooring is separated into three categories: safety, slip-resistant and smooth.

Altro Stronghold 30 is safety flooring. It's a perfect choice when there are frequent spillages of water and other contaminants present. Altro Stronghold 30 maintains its 1 in a million slip resistance even with vegetable oil, greasy water and flour underfoot. Because of this, Altro Stronghold 30 is commonly installed in commercial kitchens.

## Altro Easyclean



Rather than using a superficial surface coat, Altro Easyclean technology is incorporated into the flooring while it is manufactured. This allows Altro flooring to benefit from enhanced cleaning and maintenance while still allowing our products slip resistant properties to shine through.

Smooth flooring will have a higher level of Altro Easyclean than a slip-resistant or safety floor.

- Industry-leading ease of cleaning
- Enhanced long-term cleanability
- Cleaning and maintenance cost savings
- Sustained long-term slip resistance
- Exceptional long-term durability
- Low dirt pick-up qualities
- Improved color retention

3.0mm  
thick

6'7"  
width

49'  
length

sheet  
format





Altro Safety Flooring has achieved ICC-ES product certification and is in compliance with the following plumbing code standards:


- ANSI/ICPA SS-1 2001, Performance standard for Solid Surface Materials
- IAPMO PS 106-2015e1, Tileable Shower Receptors and Shower Kits

By complying with these standards this means that Altro safety sheet vinyl flooring is approved to be used in showers or other wet areas.




For more info please scan the QR code.







**Abyss** K3001  
WR100 / AM100 LRV 7




**Cannon** K30911  
WR101 / AM72 LRV 11




**Sear** K30503  
WR83 / AM83 LRV 15




**Dolphin** K3010  
WR86 / AM86 LRV 21




**Midnight** K30421  
WR72 / AM72 LRV 11




**Torch** K30913  
WR278 / AM42 LRV 16




**Russet** K30262  
WR41 / AM41 LRV 14




**Tundra** K30500  
WR153 / AM239 LRV 17




**Lime** K3086  
WR472 / AM381 LRV 42




**Skyline** K30332  
WR52 / AM52 LRV 24




**Surf** K30412  
WR71 / AM71 LRV 20




**Braise** K30507  
WR575 / AM223 LRV 9



**Biscuit** K30907  
WR146 / AM20 LRV 30



**Pâté** K30504  
WR61 / AM239 LRV 23

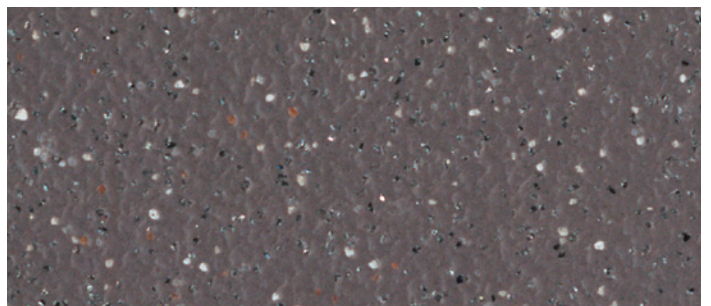

**Consommé** K30502  
WR206 / AM82 LRV 15

SKU #  
LRV  
Light  
reflectance  
value



#### Light reflectance values (LRV)

Please keep LRVs in mind when selecting walling for areas with dementia and Alzheimer's patients, seniors or individuals with poor vision.




Color matched weldrods (WR) and mastic (AM) are available. You'll find their product codes under product SKUs.

WR = Weldrod  
AM = Mastic

Color name





Altro Stronghold 30 in Benares Restaurant





Bedford Modern Kitchen chose Altro Stronghold 30



Type + class		ASTM F1303	Type II, Grade 1, Class A, safety flooring
Thickness and wear layer		3.0mm   .12", homogeneous construction	
Roll dimensions		6'7" x 49'   2m x 15m	
Weight		7.19 lbs./yd <sup>2</sup>   3.9 kg/m <sup>2</sup>   275 lbs. per roll	
Warranty		12 years	
Life expectancy		20 years	
Cleaning technology		Altro Easyclean	
Static coefficient of friction		ASTM D2047	.92 dry, .88 wet
Dynamic coefficient of friction		ANSI/NFSI B101.3	.74 wet DCOF
Ramp test		DIN 51130	R12
TRRL pendulum test		BS 7976 ASTM E303	55+
Static load limit		ASTM F970	2000 psi
Indentation		EN 433	≤ 0.10mm
Wear (abrasion) resistance		EN 660	≤ 10% 50,000 cycles
Castor chair abrasion		EN 425	Pass
Flexibility		ASTM F137	Pass
Light fastness		EN 20105-B02	≥ 6
Sound insulation		ISO 140-8	10dB
Electrical behaviors		EN 1815	≤ 2kV Antistatic
Minimum operating temperature		-22°F (-30°C)	
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
Plumbing code standards		ANSI/CPA SS-1 2001 IAPMO PS 106-2015e1	Certified
Mold resistance		ASTM D3273	Excellent - Score of 10
Fungi resistance		ASTM G21	Passes rating 0* *achieves zero growth after 21 days
Chemical resistance		ASTM F925	Tested
Recycled content		This product contains 10% post-consumer recycled content.	
Composition	Silicon carbide, aluminum trioxide and colored quartz aggregate throughout thickness of PVC.		
Backing	Non-woven polyester/cellulose glass fiber reinforcement scrim.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.		

Altro, Altro Stronghold 30 and Altro Easyclean are all trademarks of Altro Limited. Content was correct at time of creation. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.  
© Copyright Altro USA 2024

## LEED facts

LEED v4


Altro Stronghold 30

6

This product may help contribute to the following credits

- Materials and resources  
Contains recycled content 1
- Materials and resources  
Renewable bio-based content 1
- Materials and resources - EPD  
Environmental product declaration  
Type III product specific 1
- Materials and resources - HPD  
Health product declaration 1
- Environmental quality  
Low emitting materials, flooring 1
- Environmental quality  
Low emitting materials, adhesives 1


Discover more of our sustainability story and credentials at [altro.com](https://altro.com)

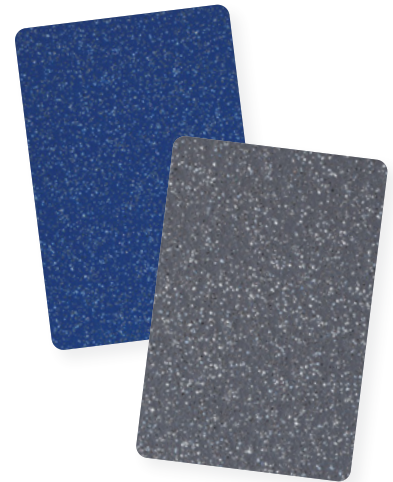

Order samples 24 hours a day at [altro.com](https://altro.com) and [materialbank.com](https://materialbank.com)



Discover more online!



Maintenance guides




Illus. cleaning guides



Warranty forms



Literature



LEED forms



Installation guides



Installation quickfacts

## Even more great resources!

- BIM components
- SDS sheets
- Detail drawings and CAD files
- High-resolution swatch downloads
- Photo galleries - [www.altropics.com](http://www.altropics.com)
- Solutions by area type - ORs, labs and cleanrooms, kitchens, senior living and more!

Follow us



📞 USA 800 377 5597

📞 CANADA 800 565 4658

✉ [support@altro.com](mailto:support@altro.com)

🌐 [www.altro.com](http://www.altro.com)

Content was correct at time of print. Altro reserves the right to change any detail. Please consult [www.altro.com](http://www.altro.com) or your local Sales Representative for the latest product information.