



Designed for possibilities.
Made for people.

NEW AND IMPROVED

Enhancements focused on the road ahead

Altro bus floors have been re-engineered for up to 20% weight savings, but it doesn't end there. We've also introduced a Heavy Duty Plus variant and added a range of other benefits to make the industry's first-choice safety flooring even better.

- Lighter
- Stronger
- Enhanced durability
- Naturally hygienic
- Even better to install

Build quality from the ground up with the lightest 2.7mm safety floor.

The next step in safety flooring



Altro Transflor Figura™

Typical applications:

Bus, coach, shuttle, emergency vehicles, recreational, specialty vehicles, mobility vehicles, mobile medical units, mobile food, delivery trucks, utility vehicles, people movers, and non-restricted rail.

A lightweight, intricately patterned bus floor which is engineered to provide excellent sustained slip resistance and now benefits from new enhancements including additional durability and up to 20% weight savings.

Achieve a complex design look with hard-wearing resilient floor performance. The newly enhanced Altro Transflor Figura is now 20% lighter in weight and stronger and more durable than ever before. Add an extra touch of sophistication to vehicles to enhance passenger experience, while retaining the assurance of sustained one in a million slip resistance. Manufactured in a 2.7mm Heavy Duty Plus thickness for maximum durability, safety never looked so good.

Why not streamline your installation by using our kit cutting service or self-adhesive options?

lightweight safety flooring for the transportation industry


Altro Transport Division 12648 Clark Street Santa Fe Springs, CA 90670

Altro reserves the right to change any information. Please consult altro.com or your local Sales Representative for the latest product range information.


USA 800.382.0333 CANADA 800.565.4658 transflor@altro.com altro.com/transport

© Copyright Altro 2022


Firework design




Boom
TFFG2701F (2.7 mm)
WR63 / A1M239 / LRV 21




Sparkler
TFFG2702F (2.7 mm)
WR81 / A1M81 / LRV 25




Crackle
TFFG2706F (2.7 mm)
WR83 / A1M83 / LRV 15




Laser
TFFG2703F (2.7 mm)
WR231 / A1M73 / LRV 11



Rocket
TFFG2704F (2.7 mm)
WR72 / A1M72 / LRV 8




Pinwheel
TFFG2705F (2.7 mm)
WR100 / A1M00 / LRV 7

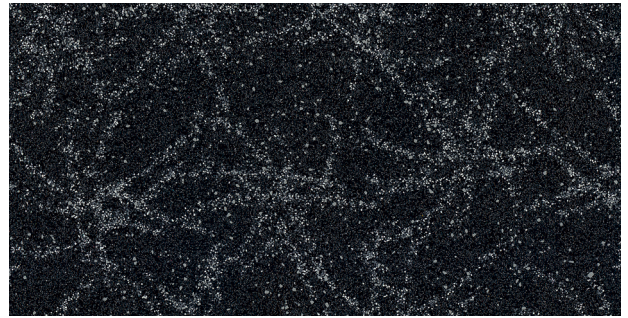


Scaled-down example of pattern


Windmill design




Titan
TFCR27402 (2.7 mm)
WR63 / A1M239 / LRV 21




Orion
TFCR27401 (2.7 mm)
WR83 / A1M83 / LRV 14




Eros
TFCR27403 (2.7 mm)
WR100 / A1M00 / LRV 7




Saturn
TFCR27406 (2.7 mm)
WR249 / A1M249 / LRV 15



Pluto
TFCR27404 (2.7 mm)
WR83 / A1M83 / LRV 15



Neptune
TFCR27405 (2.7 mm)
WR231 / A1M73 / LRV 11

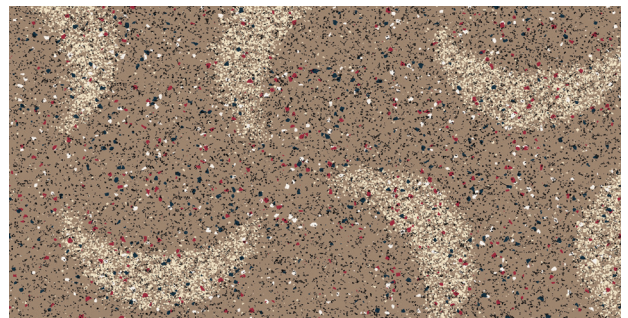

Scaled-down example of pattern

i WR = Weld rod
A1M = Mastic
LRV = Light Reflectance Value

i Color matched Weldrods (WR) and Mastics (AM) are available. You'll find their product codes under product SKUs.


i All products available in roll and kit format. Custom colors are also available.

Samples
Experience has shown that printing cannot reproduce colors accurately. If color choice is critical please request a sample of the material.

Accent and safety colors



Safety White
TFM2200 (2.2 mm)
TFM2700 (2.7 mm)
WR01 / A1M01 LRV: 58



Safety Yellow
TFM2229 (2.2 mm)
TFM2729 (2.7 mm)
WR08 / A1M200 LRV: 58

Dimensions	6'7" x 65'7" / 2 m x 20 m
Thickness	2.7 mm
Weight	4.98 lb/sy
Format	ROLL and KIT

