



altro



Altro Dolce™ Tile product datasheet

Decorative tile with enhanced vinyl content

discover [altro.com](https://www.altro.com)

Altro Dolce Tile

Altro Dolce Tile combines the natural beauty of stone with the durability and resilience of enhanced vinyl. With its homogeneous pattern construction and a factory-finished PU coating, Altro Dolce Tile will maintain its look throughout the life of the floor.

Altro Dolce Tile is a sustainable flooring option containing 72% pre-consumer recycled content, helping construction projects achieve LEED certification. Installing Altro Dolce Tile in front-of-house areas and Altro safety flooring in heavy-duty/back-of-house areas is a very economical and practical decision.

Altro Dolce Tile also looks great paired with Altro Lavencia, Altro Walkway 20 or Altro Symphonia.

Typical applications

Schools, hallways, classrooms, cafeterias, lobbies, waiting rooms, retail, supermarkets, cafes, office buildings, general circulation areas

Features + benefits


- Homogeneous construction, pattern appears throughout thickness of product
- Balanced color palette with soft, marbled looks
- Factory-finished PU coating for easy cleaning and maintenance
- Contains 72% pre-consumer recycled content
- Tested to withstand 2500 psi
- FloorScore Certified / Low VOCs

Better together

Smooth flooring from Altro gives you what you want - an economical and attractive look that's easy to install and maintain. But, in commercial areas with frequent spillages and hygiene and durability concerns, it's best to let our robust collection of safety flooring, slip-resistant flooring and wall cladding join the team!

Install smooth flooring in the dining room and public areas, and bring safety flooring and wall protection into the kitchen, bar and restrooms. You will rest easy knowing your patrons will have an exquisite experience while the most dangerous areas in your facility are well equipped to handle the tolls of the day.

We strongly recommend carrying out a risk assessment in any area in which the installation of smooth flooring is considered, focusing on the potential risk posed by contaminants.







Heilo
AD1101

LRV 70



Taza
AD1113

LRV 59



Castillo
AD1105

LRV 48



Lobo
AD1110

LRV 27



Piedra
AD502

LRV 52



Dia
AD501

LRV 68



Cemento
AD503

LRV 28



Madrid
AD505

LRV 51



Marmol
AD507

LRV 52



Barcelona
AD508

LRV 56



Playa
AD526

LRV 60



Tierra
AD514

LRV 36



Pastel
AD527

LRV 57



Granito
AD509

LRV 49



Tabaco
AD515

LRV 19



Murciélagos
AD915

LRV 6



Cielo
AD532

LRV 59



Agua
AD523

LRV 35



Oceano
AD609

LRV 30



Rio
AD524

LRV 15



Lima
AD939

LRV 43



Plátano
AD933

LRV 52



Picante
AD950

LRV 18



Lavanda
AD952

LRV 10



Cilantro
AD605

LRV 38



Marisposa
AD934

LRV 43



Sangria
AD611

LRV 13



Noche
AD504

LRV 10



Árbol
AD941

LRV 12



Ladrillo
AD511

LRV 19



Type + class		ASTM F1700	Class I, Type A, smooth tile flooring
Thickness		3.0mm .12"	
Wear layer		.12" wear layer, homogeneous construction	
Tile dimensions		18" x 18" 45.7cm x 45.7cm	
Weight		44.35 lbs/carton 20.12kg/carton (15 tiles/carton)	
Tiles per carton	15 tiles per carton		
Area per carton	33.75ft ² 3.13m ²		
Warranty		10 years	
Life expectancy		12 years	
Cleaning technology	Factory finished PU coating		
Static coefficient of friction		ASTM D2047	Greater than .6
Dynamic coefficient of friction		ANSI/NFSI B101.3	Greater than .4
Static load limit		ASTM F970	2500 psi
Taber wear abrasion		ASTM C501	95 average wear index
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
Mold resistance		ASTM D3273	Tested
Fungi resistance		ASTM G21	Tested
VOC emissions		CA 01350 FloorScore	Pass Certified
Recycled content		Contains 72% pre-consumer recycled content.	
Bio-based content		Manufactured with 5% rapidly renewable bio-based content.	
Ortho-phthalate content		Ortho-phthalate-free	
Composition	PVC 17%, calcium carbonate filler, phthalate-free plasticizer, pigments and stabilizer		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.		

Altro and Altro Dolce are all trademarks of Altro Limited. Content was correct at time of creation. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information. © Copyright Altro USA 2026

Altro and Altro Dolce are all trademarks of Altro Limited. Content was correct at time of creation. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information. © Copyright Altro USA 2026

LEED facts



LEED v5
This product may help contribute to the following credits

Altro Dolce Tile


Quantify and assess embodied carbon
Materials and resources, MRp2

Reduce embodied carbon
Materials and resources, MRc2

Low-emitting materials
Materials and resources, MRc3


Building product select and procurement
Materials and resources, MRc4

Discover more of our sustainability story and credentials at altro.com

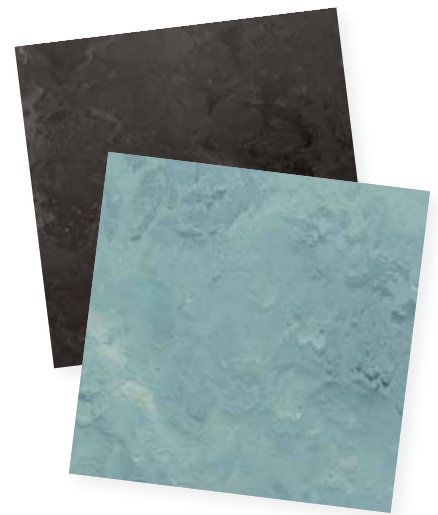

Order samples 24 hours a day at altro.com and materialbank.com

Discover more online!



Maintenance guides



Illus. cleaning guides




Warranty forms



Literature



LEED forms



Installation guides



Installation quickfacts

Even more great resources!

- BIM components
- SDS sheets
- Detail drawings and CAD files
- High-resolution swatch downloads
- Photo galleries - www.altropics.com
- Solutions by area type - ORs, labs and cleanrooms, kitchens, senior living and more!

Follow us



📞 USA 800 377 5597

📞 CANADA 800 565 4658

✉️ support@altro.com

🌐 www.altro.com

Content was correct at time of print. Altro reserves the right to change any detail. Please consult www.altro.com or your local Sales Representative for the latest product information.