Designed for possibilities. Made for people.

EXIT

# Altro Quartz Tile<sup>™</sup> product datasheet

Robust and durable, compressed quartz tile for high traffic areas

**∃**→ altro

-state

## **Altro Quartz Tile**

Altro Quartz Tile is a homogeneous tile available in chip and marble patterns, providing endless design options for commercial, industrial or public sector applications. Static load testing that exceeds 3000 psi proves Altro Quartz Tile is ideal for heavy pedestrian traffic areas. These tiles are occupancy ready, eliminating the need for initial application of floor finish.

Generate school spirit by pairing logos and colors or improve company morale with vibrant hues that inspire vitality throughout the office.

Altro Quartz Tile also looks great paired with Altro Lavencia or Altro Walkway 20.

## Typical applications

Schools, hallways, classrooms, cafeterias, lobbies, waiting rooms, retail, supermarkets, cafes, office buildings, general circulation areas, warehouse and industrial areas, forklift trafficked areas


#### Features + benefits

- Homogeneous construction, available in chip and striated patterns
- Static load limit of 3,000 psi
- Easier and faster to install than VCT
- Occupancy ready, no finish required
- 70% quartz content for extreme durability
- PUR coating easy to maintain and better cleanability compared to non PUR treated products
- Low VOCs



## A better alternative to VCT

Vinyl composition tile attempts to lure you in with low installation cost, but don't take the bait. Constant maintenance over VCT's useful life can cause your total costs in less than five years to be more than Altro Quartz Tile's cost after ten years!

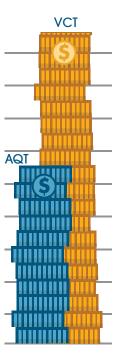


#### Better together

Smooth flooring from Altro gives you what you want an economical and attractive look that's easy to install and maintain. But, in commercial areas with frequent spills and hygiene and durability concerns, it's best to let our robust collection of safety flooring, slipresistant flooring and wall cladding join the team!

Install smooth flooring in the dining room and public areas, and bring safety flooring and wall protection into the kitchen, bar and restrooms. You will rest easy knowing your patrons will have an exquisite experience while the most dangerous areas in your facility are well equipped to handle the tolls of the day.

We strongly recommend carrying out a risk assessment in any area in which the installation of smooth flooring is considered, focusing on the potential risk posed by contaminants.





Chalk CD 9301


LRV 60

Chalk

9701


9303

9304



Ice CD 9351

LRV 40



Thunder CD LRV 20 9318



LRV 58

Ash CD LRV 26



Steel CD LRV 17





Ash 9703

Rock Salt CD

9302

LRV 41

LRV 27




Charcoal CD LRV 13 9306



Rock Salt 9702

LRV 45



LRV 30 Platinum CD 9317



Celery CD LRV 37 9361



Sand 9722



Latte 9723


LRV 27





LRV 30 Latte CD


9323



LRV 32

LRV 12

Shale CD 9324



Espresso CD 9328



Shale

9724

9321

LRV 33




LRV 54






Cream 9721

LRV 54




LRV 7

Onyx CD 9319



Onyx 9719



LRV 7


LRV 10

LRV 11

Emerald 9772

Ocean CD

9359



Lemongrass CD LRV 34 9363



Slate 9753 LRV 22



Citrine 9773



Amethyst 9771





Garnet

9770

LRV 13



Fern CD 9367

LRV 25

LRV 29



Slate CD 9353




Sunglow CD LRV 49 9329



Coral

9774

LRV 18



Moss CD LRV 21 9366




LRV 12

Lapis


9775



Curry CD LRV 38 9325



Firecracker CD LRV 12 9349



Terracotta CD LRV 21 9344



Brick CD 9320

LRV 13

W.

# UPPER MORELAND HIGH SCHOOL



B

Specifications				
Type + class		ASTM F1700	Class I, Type A, smooth tile flooring	
Thickness		2.0mm   .08" wear layer, homogeneous construction		
Tile dimensions	24" x 24"   61cm x 61cm			
Tiles per carton	15 tiles per carton			
Area per carton	60ft²   5.54m²			
Weight	ß	48 lbs/carton   21.8 kg/carton		
Warranty	15 year product warranty	15 years		
Life expectancy	(Pear Pear	20 years		
Cleaning technology	Factory finished PUR coating			
Static coefficient of friction	>.6 SCOF	ASTM D2047	Greater than .6	
Dynamic coefficient of friction	.27 DCOF	ANSI/NFSI B101.3	.27 wet DCOF	
Static load limit		ASTM F970	3000 psi	
Fire and smoke performance	Ó	CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450	
VOC emissions	Voč	CA 01350	Pass	
Bio-based content	<b>With State</b>	Contains up to 6% rapidly renewable bio-based content.		
Ortho-phthalate content	Catholicite), free	Ortho-phthalate-free		
Composition	Compressed quartz and vinyl. Decorative vinyl chips and striations added to enhance appearance.			
Content	Contains 70% quartz and 15% vinyl.			
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.			
Altro and Altro Quartz Tile are all trademarks of Altro Limited. Content was correct at time of creation.				
Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.				



Discover more of our sustainability story and credentials at www.altro.com



₽	
altro	



Order samples 24 hours a day at altro.com and materialbank.com

© Copyright Altro USA 2024

#### Discover more online!





Illus. cleaning guides



Warranty forms



Literature



LEED forms

Installation guides



Installation quickfacts

#### Even more great resources!

- BIM components
- SDS sheets
- Detail drawings and CAD files
- High-resolution swatch downloads
- Photo galleries www.altropics.com
- Solutions by area type ORs, labs and cleanrooms, kitchens, senior living and more!



**♥ USA** 800 377 5597

- **◊ CANADA** 800 565 4658
- www.altro.com

Content was correct at time of print. Altro reserves the right to change any detail. Please consult www.altro.com or your local Sales Representative for the latest product information.