

Installation techniques and detailing

In situ cove detail with retaining rebate


January 2017

In situ cove detail can be produced using standard flooring products in conjunction with Altro TX. The suitability of the vertical background and priming procedure is vital to the successful installation of the Altro resin in situ cove detail. With the following backgrounds being acceptable: brickwork (stable); blockwork; cement / polymer render; WBP plywood (suitably supported). (N.B. Seek Altro technical advice for wall structures comprising: plasterboard / gypsum / plaster / powder coated products / stainless steel). The top edge of the cove detail should incorporate an angle bead as

shown, with the foot of the cove running into a rebate detail where Altro Crete products are being installed. Altro Cove systems make use of a double prime method. The floor and wall upstand should be primed and seeded with nominal 1mm kiln dry aggregate and allowed to cure. Approximately ten minutes before application of the cove, new Altro Prime standard mixed with Altro TX to form a paste should be applied to the upstand. The cove is applied onto the wet primer.

Drawing Ref: RF2/07/00

(Dural UK Ltd: 01924 360110)

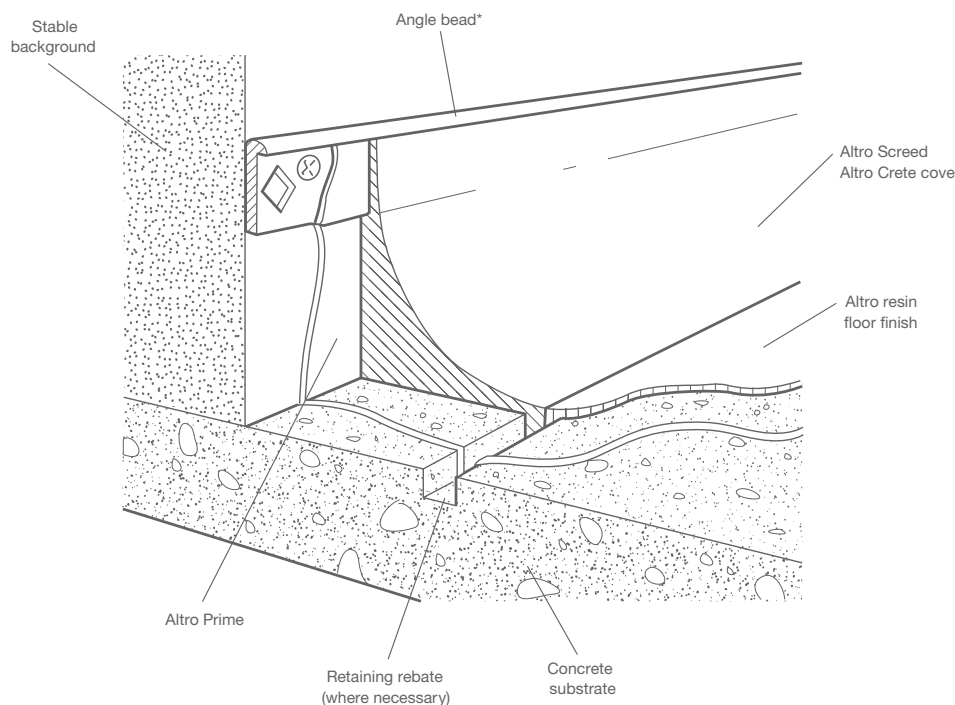

For further information or technical advice

tel: 01462 707604 fax: 01462 707515

email: enquiries@altro.com or www.altro.com