

altro

Altro Everlay underlayment

Designed to overcome subfloor problems when installing Altro flooring over irregular surfaces

Description

Altro Everlay is an impervious sheet vinyl underlayment designed to overcome the problems that can be encountered when laying Altro high-performance sheet floor coverings over certain damp surfaces, existing resilient flooring, or subfloors contaminated with oil, paint or old adhesive residue.

Although Altro Everlay enables the installation of Altro sheet floor covering over damp subfloors, the system does not constitute a waterproof membrane.

The main advantages of Altro Everlay A are that it:


- Provides a continuous base that is stabilized and moisture-resistant
- Cuts down installation time as it can reduce subfloor drying times
- Allows for a new temporary floor to be laid over an existing floor, without adhesive damage during removal

Typical applications

- Temporary walkways or areas where substrate may need to be used later
- Areas where subfloor has been exposed to water spillage
- On metal access floor systems
- On subfloors that are contaminated with oil, paint, old asphalt adhesives, etc.

Features and benefits

- Provides a continuous base which is stabilized and resistant to moisture.
- Reduces installation time as it can eliminate waiting for subfloors to dry or warm up.
- Reduces the requirements for subfloor preparation.
- Allows Altro flooring to be installed over existing floors eliminating costly removal of the old flooring, particularly when they contain asbestos.

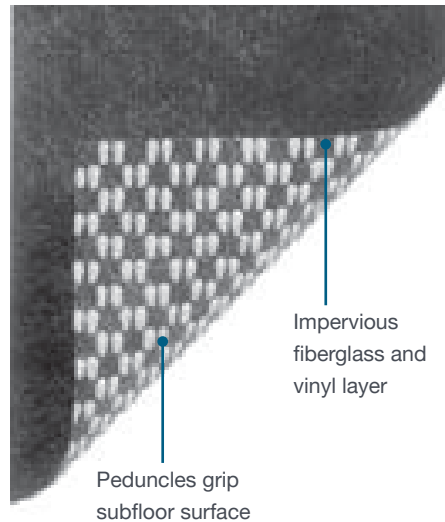

Acoustic Everlay A

Gauge	1.2mm 0.5"
Width	6'7" 2m
Length	164' 50m

Composition

Altro Everlay is glass fiber sheet coated with an impervious vinyl layer on both sides and vinyl channel surface on the underside.

All resilient floor coverings, when installed in conjunction with an underlayment are prone to increased indentation from point loading. Please discuss with your sales rep.