



altro

the future is safer with altro

# Installation techniques and detailing


Self-coved with cove former and capping seal (Ref: C7/03/05)

November 2016

For locations which are not subject to liquid spillages on the wall. The Altro sheet flooring should be covered over a CF38R /CF20R radius cove former, fixed at the junction of the wall and floor, up to a minimum height of 100mm and finished into Capping Seal C7.

The cove former, Altro flooring and C7 used in this section must be adhered with a suitable contact adhesive. All mitres and joints within the coving must be hot welded.

**Drawing Ref: D4/03/05**

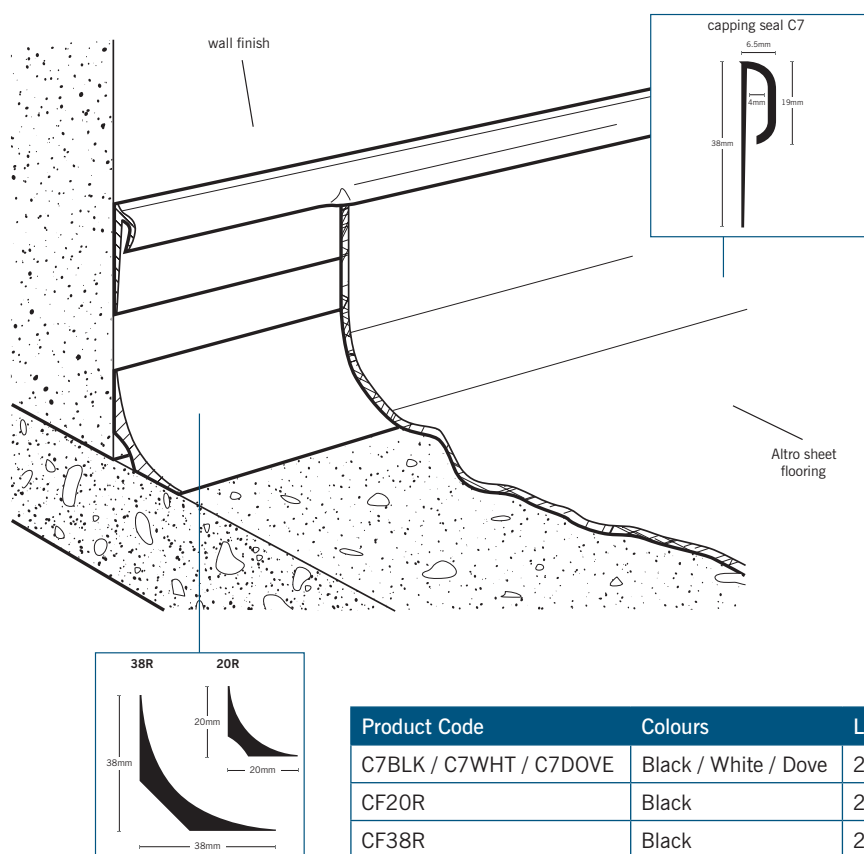

For further information or technical advice  
tel: 01462 707604 fax: 01462 707515  
email: [enquiries@altro.com](mailto:enquiries@altro.com) or [www.altro.com](http://www.altro.com)