



Designed for possibilities.
Made for people.

Altro Walkway™ 20 product datasheet

Multi-purpose slip-resistant flooring in modern and traditional looks

Altro Walkway 20

Altro Walkway 20 is our hugely popular hard-wearing 2mm slip-resistant flooring. The range shares its palette with Altro XpressLay. This enables you to combine both ranges when you need traditionally-adhered and adhesive-free flooring in adjacent areas while maintaining a consistent look.

What's even better is Altro Walkway 20 offers you two distinct looks; traditional and modern. Both looks come with Altro Easyclean technology for superior cleanability and stain resistance.

A static-dissipative version is available, specifically designed for locations where static buildup must be avoided.

Altro Walkway 20 also looks great when paired with Altro XpressLay, Altro Aquarius, Altro Wood, Altro Orchestra or even Altro Zodiac Smooth.

Typical applications

General purpose

Features + benefits

- Hard-wearing 2mm slip-resistant flooring
- Shares palette with Altro XpressLay, allows coordination between traditionally adhered and adhesive-free slip-resistant flooring
- Matches colors with Altro Aquarius, allowing for seamless coordination from wet rooms to general areas.
- Static dissipative version available
- Achieves R10 slip resistance rating and SCoF of .78 dry, .80 wet
- FloorScore Certified / Low VOCs
- This product does not contain PFAs

Slip resistance



It is designers, specifiers and end-users' responsibility to ensure flooring is fit for purpose, and it's part of our role here at Altro to help make this process easy. Our flooring is separated into three categories: safety, slip-resistant and smooth.

Altro Walkway 20 is a slip-resistant flooring. It's a perfect choice for many commercial areas in which your slip risk is not as high as a commercial kitchen or other wet environments, but your patrons, patients, students and employees still deserve to be secure on their feet. Slip-resistant flooring from Altro will reduce the risk of slips, give you peace of mind and look good doing so.



Altro Easyclean

Rather than using a superficial surface coat, Altro Easyclean Technology is incorporated into the flooring while it is manufactured. This allows Altro flooring to benefit from enhanced cleaning and maintenance while still allowing our products' slip-resistant properties to shine through.


Smooth flooring will have a higher level of Altro Easyclean than a slip-resistant or safety floor.

- Industry-leading ease of cleaning
- Enhanced long-term cleanability
- Cleaning and maintenance cost savings
- Sustained long-term slip resistance
- Exceptional long-term durability
- Low dirt pick-up qualities
- Improved color retention







Cromwell Vets chose Altro Walkway 20.




Swan VMI2012P
WR291 / AM01 LRV 75




Winter VMI2053
WR105 / AM01 LRV 61




Blizzard VMI2055
WR79 / AM191 LRV 44




Streetlight VMI2005P
WR287 / AM79 LRV 45




Cloud VM2014
WR79 / AM191 LRV 41



Temple VM2009P
WR261 / AM81 LRV 27




Rock VMI2004P
WR84 / AM84 LRV 23




Fog VM20153
WR81 / AM81 LRV 27


Fog available in static dissipative through special order.
VM20153SD




Dolphin VM2010
WR86 / AM86 LRV 21




Whale VMI2054
WR86 / AM86 LRV 20




Nickel VMI2019P
WR81 / AM81 LRV 29




Pavement VMI2007P
WR83 / AM83 LRV 14




Runway VM2006P
WR72 / AM72 LRV 9




Midnight VM20421
WR72 / AM72 LRV 11




Nightfall VMI2056
WR72 / AM72 LRV 10




Black VM20892
WR100 / AM100 LRV 6




Coal VMI2058
WR100 / AM100 LRV 6




Tarragon VMI2052
WR52 / AM52 LRV 26




Skyline VM20332
WR52 / AM52 LRV 24




Minster VM2018P
WR289 / AM265 LRV 40




Bisque VMI2021P
WR364 / AM335 LRV 50




Sand VMI2051
WR20 / AM20 LRV 40




Tan VMI2018P
WR362 / AM20 LRV 41




Rodeo VMI2020P
WR363 / AM265 LRV 37




Bone VMI20215
WR20 / AM20 LRV 37




Biscuit VMI20907
WR146 / AM20 LRV 30




Tundra VMI20910
WR153 / AM239 LRV 17




Savannah VMI2050
WR153 / AM239 LRV 19




Tango VM2031
WR42 / AM42 LRV 14




Lupin VMI2059
WR286 / AM286 LRV 17



Blue VM20412
WR71 / AM71 LRV 22



River VMI2057
WR71 / AM71 LRV 22




Altro Walkway 20 in Fog at the Skou Building


Type + class		ASTM F1303	Type II, Grade 1, Class A, safety flooring
Thickness and wear layer		2.0mm .08", homogenous construction	
Roll dimensions		6'7" x 65'5" 2m x 20m	
Weight		4.79 lbs./yd ² 2.6 kg/m ² 220 lbs. per roll	
Warranty		10 years	
Life expectancy		15 years	
Cleaning technology		Altro Easyclean	
Static coefficient of friction		ASTM D2047	.78 dry, .8 wet
Dynamic coefficient of friction		ANSI/NFSI B101.3	.66 wet DCOF
Ramp test		DIN 51130	R10
TRRL pendulum test		BS 7976 ASTM E303	36+
Static load limit		ASTM F970	1000 psi
Indentation		EN 433	≤ 0.10mm
Wear (abrasion) resistance		EN 660	≤ 10% 50,000 cycles
Castor chair abrasion		EN 425	Pass
Flexibility		ASTM F137	Pass
Light fastness		EN 20105-B02	≥ 6
Sound insulation		ISO 140-8	5dB
Electrical behaviors		EN 1815	≤ 2kV Antistatic
Surface resistivity (only for Altro Walkway 20 SD)		EN 1081	2x10 ⁹ Ω
Chemical resistance		ASTM F925	Tested
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
Minimum operating temperature		-4°F (-20°C)	
VOC emissions		CA 01350 FloorScore	Pass Certified
Bio-based content		Manufactured with rapidly renewable bio-based content.	
Ortho-phthalate content		Ortho-phthalate-free	
Recycled content		Contains 10% pre-consumer + 10% post-consumer recycled content.	
Composition	Aluminum trioxide and colored quartz aggregate throughout thickness. Silicon carbide also present on traditional "sparkly" hues. Altro Easyclean incorporated for exceptional cleanability.		
Backing	Non-woven polyester/cellulose glass fiber reinforcement scrim.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.		

LEED facts		 
LEED v4		This product may help contribute to the following credits
Altro Walkway 20		6
	Materials and resources Contains recycled content	1
	Materials and resources Renewable bio-based content	1
	Materials and resources - EPD Environmental product declaration Type III product specific	1
	Materials and resources - HPD Health product declaration	1
	Environmental quality Low emitting materials, flooring	1
	Environmental quality Low emitting materials, adhesives	1

Discover more of our sustainability story and credentials at altro.com

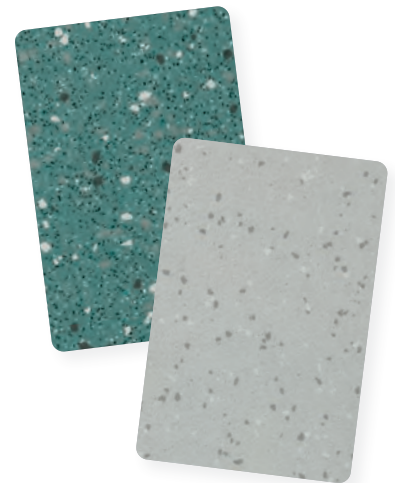

Order samples 24 hours a day at altro.com and materialbank.com

 These select quick-ship colors, are heavily stocked and consistently available in our North American warehouses.

Discover more online!



Maintenance guides




Illus. cleaning guides



Warranty forms



Literature



LEED forms



Installation guides



Installation quickfacts

Even more great resources!

- BIM components
- SDS sheets
- Detail drawings and CAD files
- High-resolution swatch downloads
- Photo galleries - www.altropics.com
- Solutions by area type - ORs, labs and cleanrooms, kitchens, senior living and more!

Follow us



📞 USA 800 377 5597

📞 CANADA 800 565 4658

✉ support@altro.com

🌐 www.altro.com

Content was correct at time of print. Altro reserves the right to change any detail. Please consult www.altro.com or your local Sales Representative for the latest product information.