



DSDC product accreditation

Altro Tegulis™

Chevron | 141mm x 408mm

Class 1b



White | W103-W104 | LRV 89

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.



DSDC product accreditation

Altro Tegulis™

Herringbone | 62mm x 197mm

Class 1a - white



White | W103-W104 | LRV 89

Class 1b - wall designs



White Mineral | 9905 | LRV 61



Cool Mineral | 9906 | LRV 48



Soft Elegance | 9918 | LRV 54

DSDC product accreditation rating key

class 1a

Finishes within this rating are plain and can be used indiscriminately.

That said, bear in mind the need to contrast flooring with walls, skirtings, doors / frames, furniture & sanitary ware.

Contrast is the key word.

We recommend a minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

Finishes within this rating are semi-plain (minimal texture or fleck / and or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.




DSDC product accreditation

Altro Tegulis™

Herringbone | 62mm x 197mm


Class 1b - satins




Linen | 41 | LRV 83



Hessian | 233 | LRV 68




Silk | 229 | LRV 68




Fawn | 206 | LRV 41




Oyster | 32 | LRV 73



Blossom | 230 | LRV 77




Blush | 231 | LRV 29



Clay | 224 | LRV 29




Spa | 232 | LRV 81




Seafoam | 43 | LRV 81




Serenity | 227 | LRV 56



Promenade | 212 | LRV 32



Mint | 203 | LRV 59




Orchard | 223 | LRV 50




Honeydew | 225 | LRV 60




Bergamot | 220 | LRV 26




Ice | 44 | LRV 80



Breeze | 228 | LRV 64



Clarity | 207 | LRV 64



Flint | 201 | LRV 32




Vibrance | 213 | LRV 22




Ozone | 211 | LRV 10




Twilight | 226 | LRV 12




Dakota | 209 | LRV 6



Cesco | 53 | LRV 72



Echo | 208 | LRV 36



Urban | 210 | LRV 28

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.



DSDC product accreditation

Altro Tegulis™

Hexagon | 112mm x 130mm

Class 1a - white



White | W103-W104 | LRV 89

Class 1b - wall designs



White Mineral | 9905 | LRV 61



Cool Mineral | 9906 | LRV 48



Soft Elegance | 9918 | LRV 54



White Woodgrain | 9915 | LRV 79

DSDC product accreditation rating key

class 1a

Finishes within this rating are plain and can be used indiscriminately.

That said, bear in mind the need to contrast flooring with walls, skirtings, doors / frames, furniture & sanitary ware.

Contrast is the key word.

We recommend a minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

Finishes within this rating are semi-plain (minimal texture or fleck / and or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.



DSDC product accreditation

Altro Tegulis™

Hexagon | 112mm x 130mm

Class 1b - satins



Linen | 41 | LRV 83



Hessian | 233 | LRV 68



Silk | 229 | LRV 68




Fawn | 206 | LRV 41




Oyster | 32 | LRV 73



Blossom | 230 | LRV 77



Blush | 231 | LRV 29



Clay | 224 | LRV 29



Spa | 232 | LRV 81



Seafoam | 43 | LRV 81



Serenity | 227 | LRV 56



Promenade | 212 | LRV 32



Mint | 203 | LRV 59



Orchard | 223 | LRV 50



Honeydew | 225 | LRV 60



Bergamot | 220 | LRV 26




Ice | 44 | LRV 80



Breeze | 228 | LRV 64



Clarity | 207 | LRV 64




Flint | 201 | LRV 32



Vibrance | 213 | LRV 22




Ozone | 211 | LRV 10




Twilight | 226 | LRV 12



Dakota | 209 | LRV 6



Cesco | 53 | LRV 72



Echo | 208 | LRV 36



Urban | 210 | LRV 28

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.



DSDC product accreditation

Altro Tegulis™


KitKat | 147mm x 22mm

Class 1a - white



White | W103-W104 | LRV 89


Class 1b - wall designs




White Mineral | 9905 | LRV 61



Cool Mineral | 9906 | LRV 48



Soft Elegance | 9918 | LRV 54



White Woodgrain | 9915 | LRV 79

DSDC product accreditation rating key

class 1a

Finishes within this rating are plain and can be used indiscriminately.

That said, bear in mind the need to contrast flooring with walls, skirtings, doors / frames, furniture & sanitary ware.

Contrast is the key word.

We recommend a minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

Finishes within this rating are semi-plain (minimal texture or fleck / and or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.



























DSDC product accreditation

Altro Tegulis™

KitKat | 147mm x 22mm

Class 1b - satins

 Linen 41 LRV 83	 Hessian 233 LRV 68	 Silk 229 LRV 68	 Fawn 206 LRV 41	 Oyster 32 LRV 73	 Blossom 230 LRV 77	 Blush 231 LRV 29	 Clay 224 LRV 29
 Spa 232 LRV 81	 Seafoam 43 LRV 81	 Serenity 227 LRV 56	 Promenade 212 LRV 32	 Mint 203 LRV 59	 Orchard 223 LRV 50	 Honeydew 225 LRV 60	 Bergamot 220 LRV 26
 Ice 44 LRV 80	 Breeze 228 LRV 64	 Clarity 207 LRV 64	 Flint 201 LRV 32	 Vibrance 213 LRV 22	 Ozone 211 LRV 10	 Twilight 226 LRV 12	 Dakota 209 LRV 6
 Cesco 53 LRV 72	 Echo 208 LRV 36	 Urban 210 LRV 28					

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.




DSDC product accreditation

Altro Tegulis™


Mosaic | 35mm x 35mm

Class 1a - white




White | W103-W104 | LRV 89


Class 1b - wall designs




White Mineral | 9905 | LRV 61



Cool Mineral | 9906 | LRV 48



Soft Elegance | 9918 | LRV 54



White Woodgrain | 9915 | LRV 79

DSDC product accreditation rating key

class 1a

Finishes within this rating are plain and can be used indiscriminately.

That said, bear in mind the need to contrast flooring with walls, skirtings, doors / frames, furniture & sanitary ware.

Contrast is the key word.

We recommend a minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

Finishes within this rating are semi-plain (minimal texture or fleck / and or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.




DSDC product accreditation

Altro Tegulis™

Mosaic | 35mm x 35mm

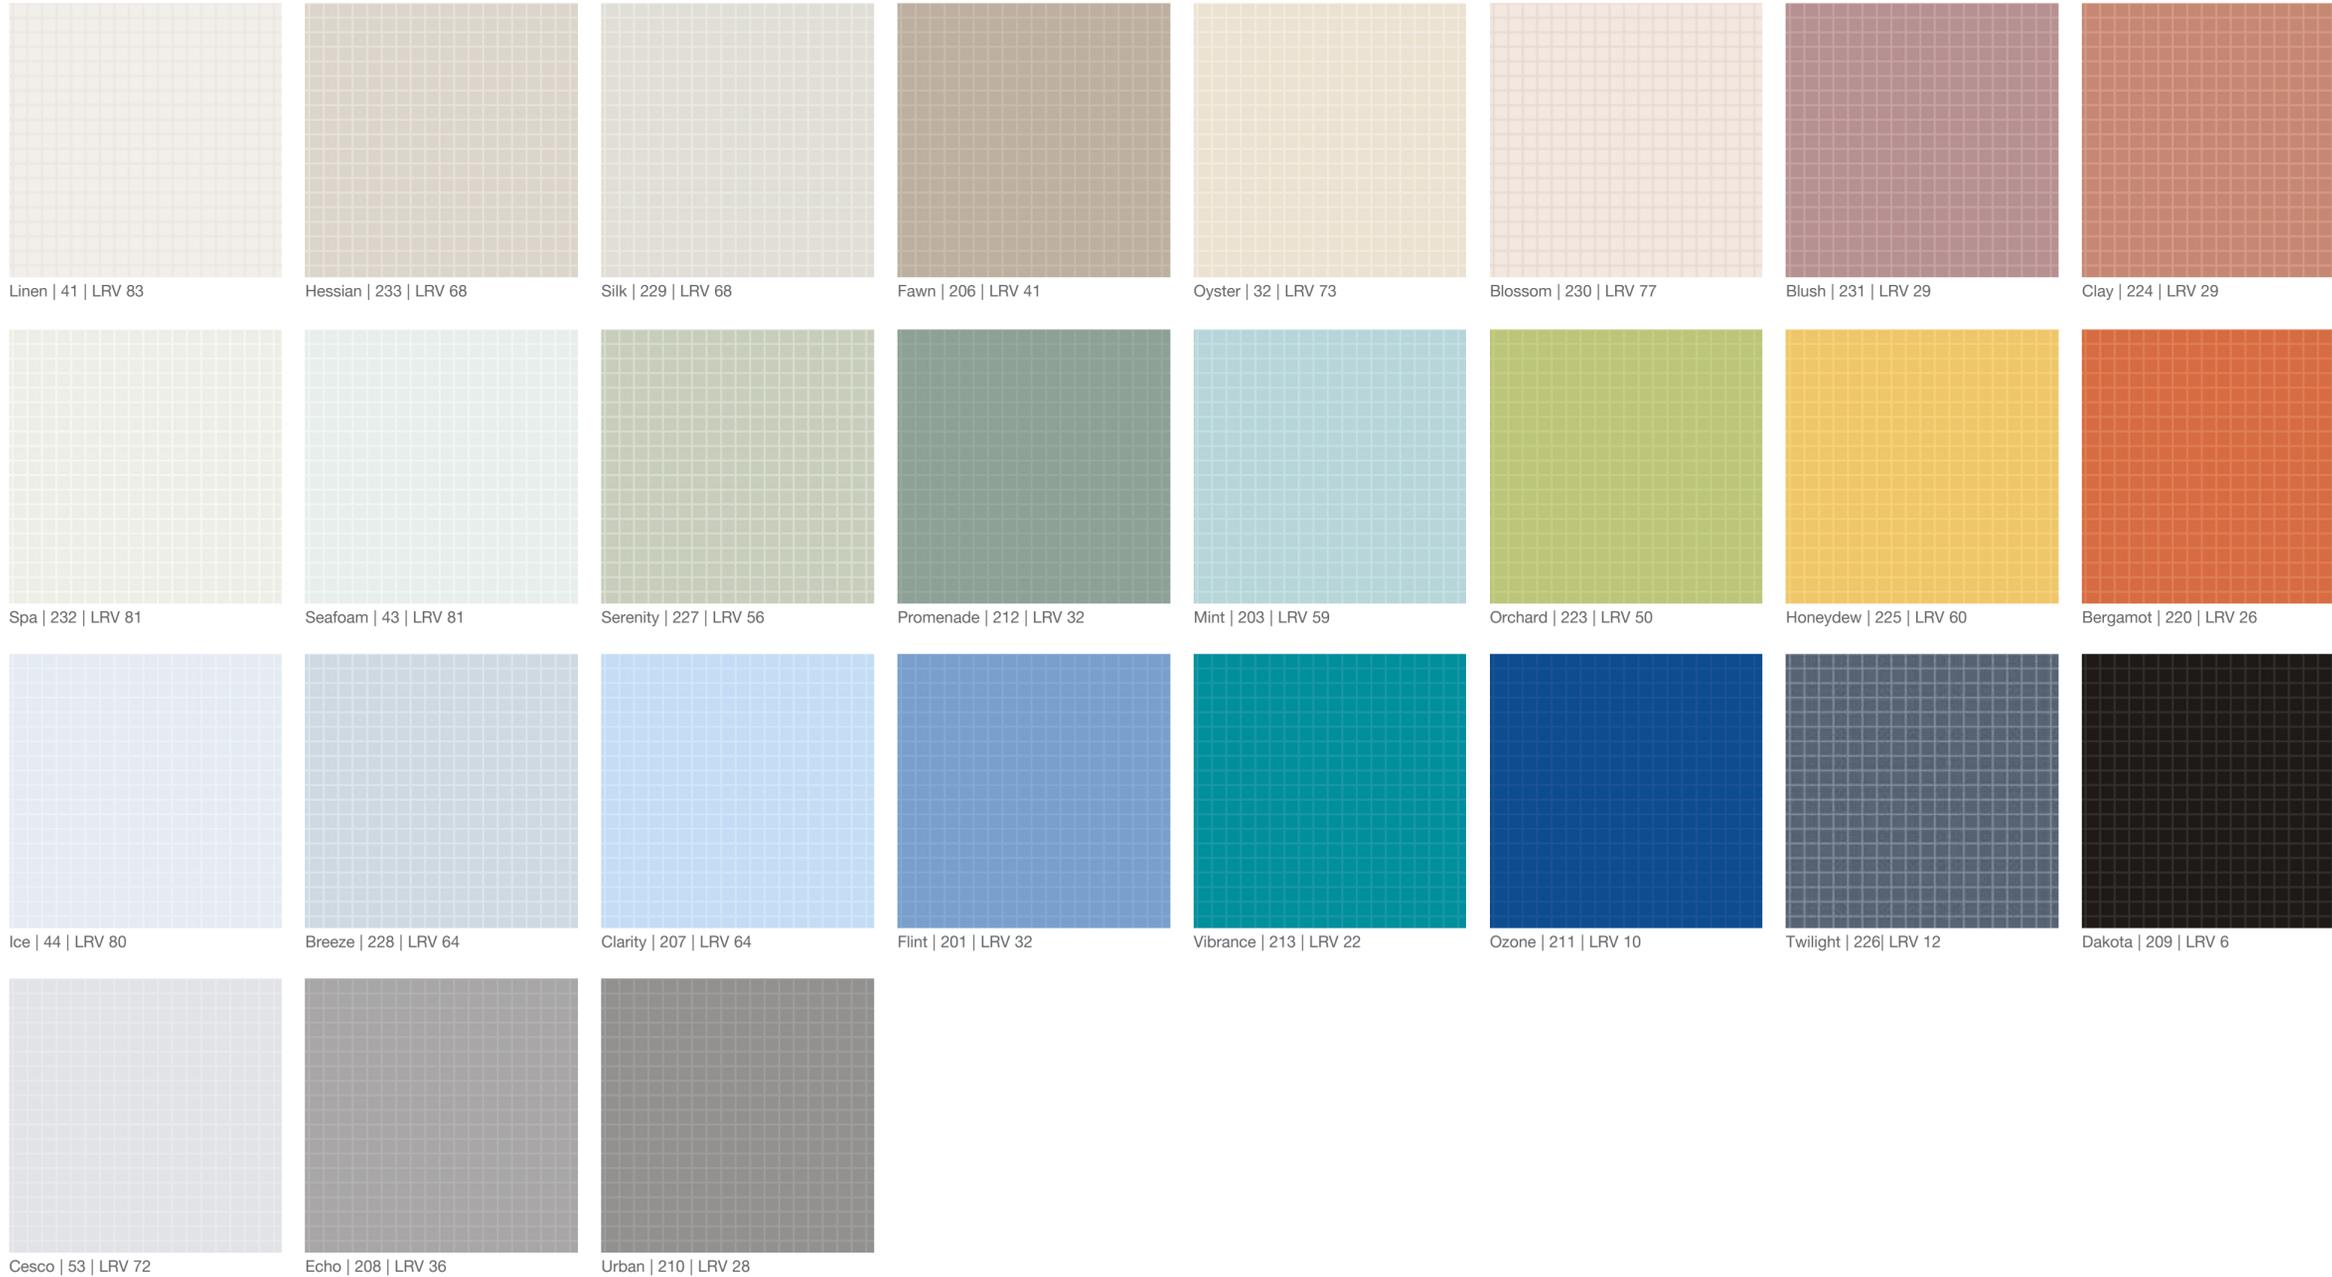Class 1b - satins



DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.



DSDC product accreditation

Altro Tegulis™


Mosaic | 53mm x 53mm

Class 1a - white




White | W103-W104 | LRV 89


Class 1b - wall designs




White Mineral | 9905 | LRV 61



Cool Mineral | 9906 | LRV 48



Soft Elegance | 9918 | LRV 54



White Woodgrain | 9915 | LRV 79

DSDC product accreditation rating key

class 1a

Finishes within this rating are plain and can be used indiscriminately.

That said, bear in mind the need to contrast flooring with walls, skirtings, doors / frames, furniture & sanitary ware.

Contrast is the key word.

We recommend a minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

Finishes within this rating are semi-plain (minimal texture or fleck / and or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.




























DSDC product accreditation

Altro Tegulis™

Mosaic | 53mm x 53mm

Class 1b - satins

 Linen 41 LRV 83	 Hessian 233 LRV 68	 Silk 229 LRV 68	 Fawn 206 LRV 41	 Oyster 32 LRV 73	 Blossom 230 LRV 77	 Blush 231 LRV 29	 Clay 224 LRV 29
 Spa 232 LRV 81	 Seafoam 43 LRV 81	 Serenity 227 LRV 56	 Promenade 212 LRV 32	 Mint 203 LRV 59	 Orchard 223 LRV 50	 Honeydew 225 LRV 60	 Bergamot 220 LRV 26
 Ice 44 LRV 80	 Breeze 228 LRV 64	 Clarity 207 LRV 64	 Flint 201 LRV 32	 Vibrance 213 LRV 22	 Ozone 211 LRV 10	 Twilight 226 LRV 12	 Dakota 209 LRV 6
 Cesco 53 LRV 72	 Echo 208 LRV 36	 Urban 210 LRV 28					

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.




DSDC product accreditation

Altro Tegulis™


Square | 100mm x 100mm

Class 1a - white




White | W103-W104 | LRV 89


Class 1b - wall designs



White Mineral | 9905 | LRV 61



Cool Mineral | 9906 | LRV 48



Soft Elegance | 9918 | LRV 54



White Woodgrain | 9915 | LRV 79

DSDC product accreditation rating key

class 1a

Finishes within this rating are plain and can be used indiscriminately.

That said, bear in mind the need to contrast flooring with walls, skirtings, doors / frames, furniture & sanitary ware.

Contrast is the key word.

We recommend a minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

Finishes within this rating are semi-plain (minimal texture or fleck / and or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.




DSDC product accreditation

Altro Tegulis™

Square | 100mm x 100mm

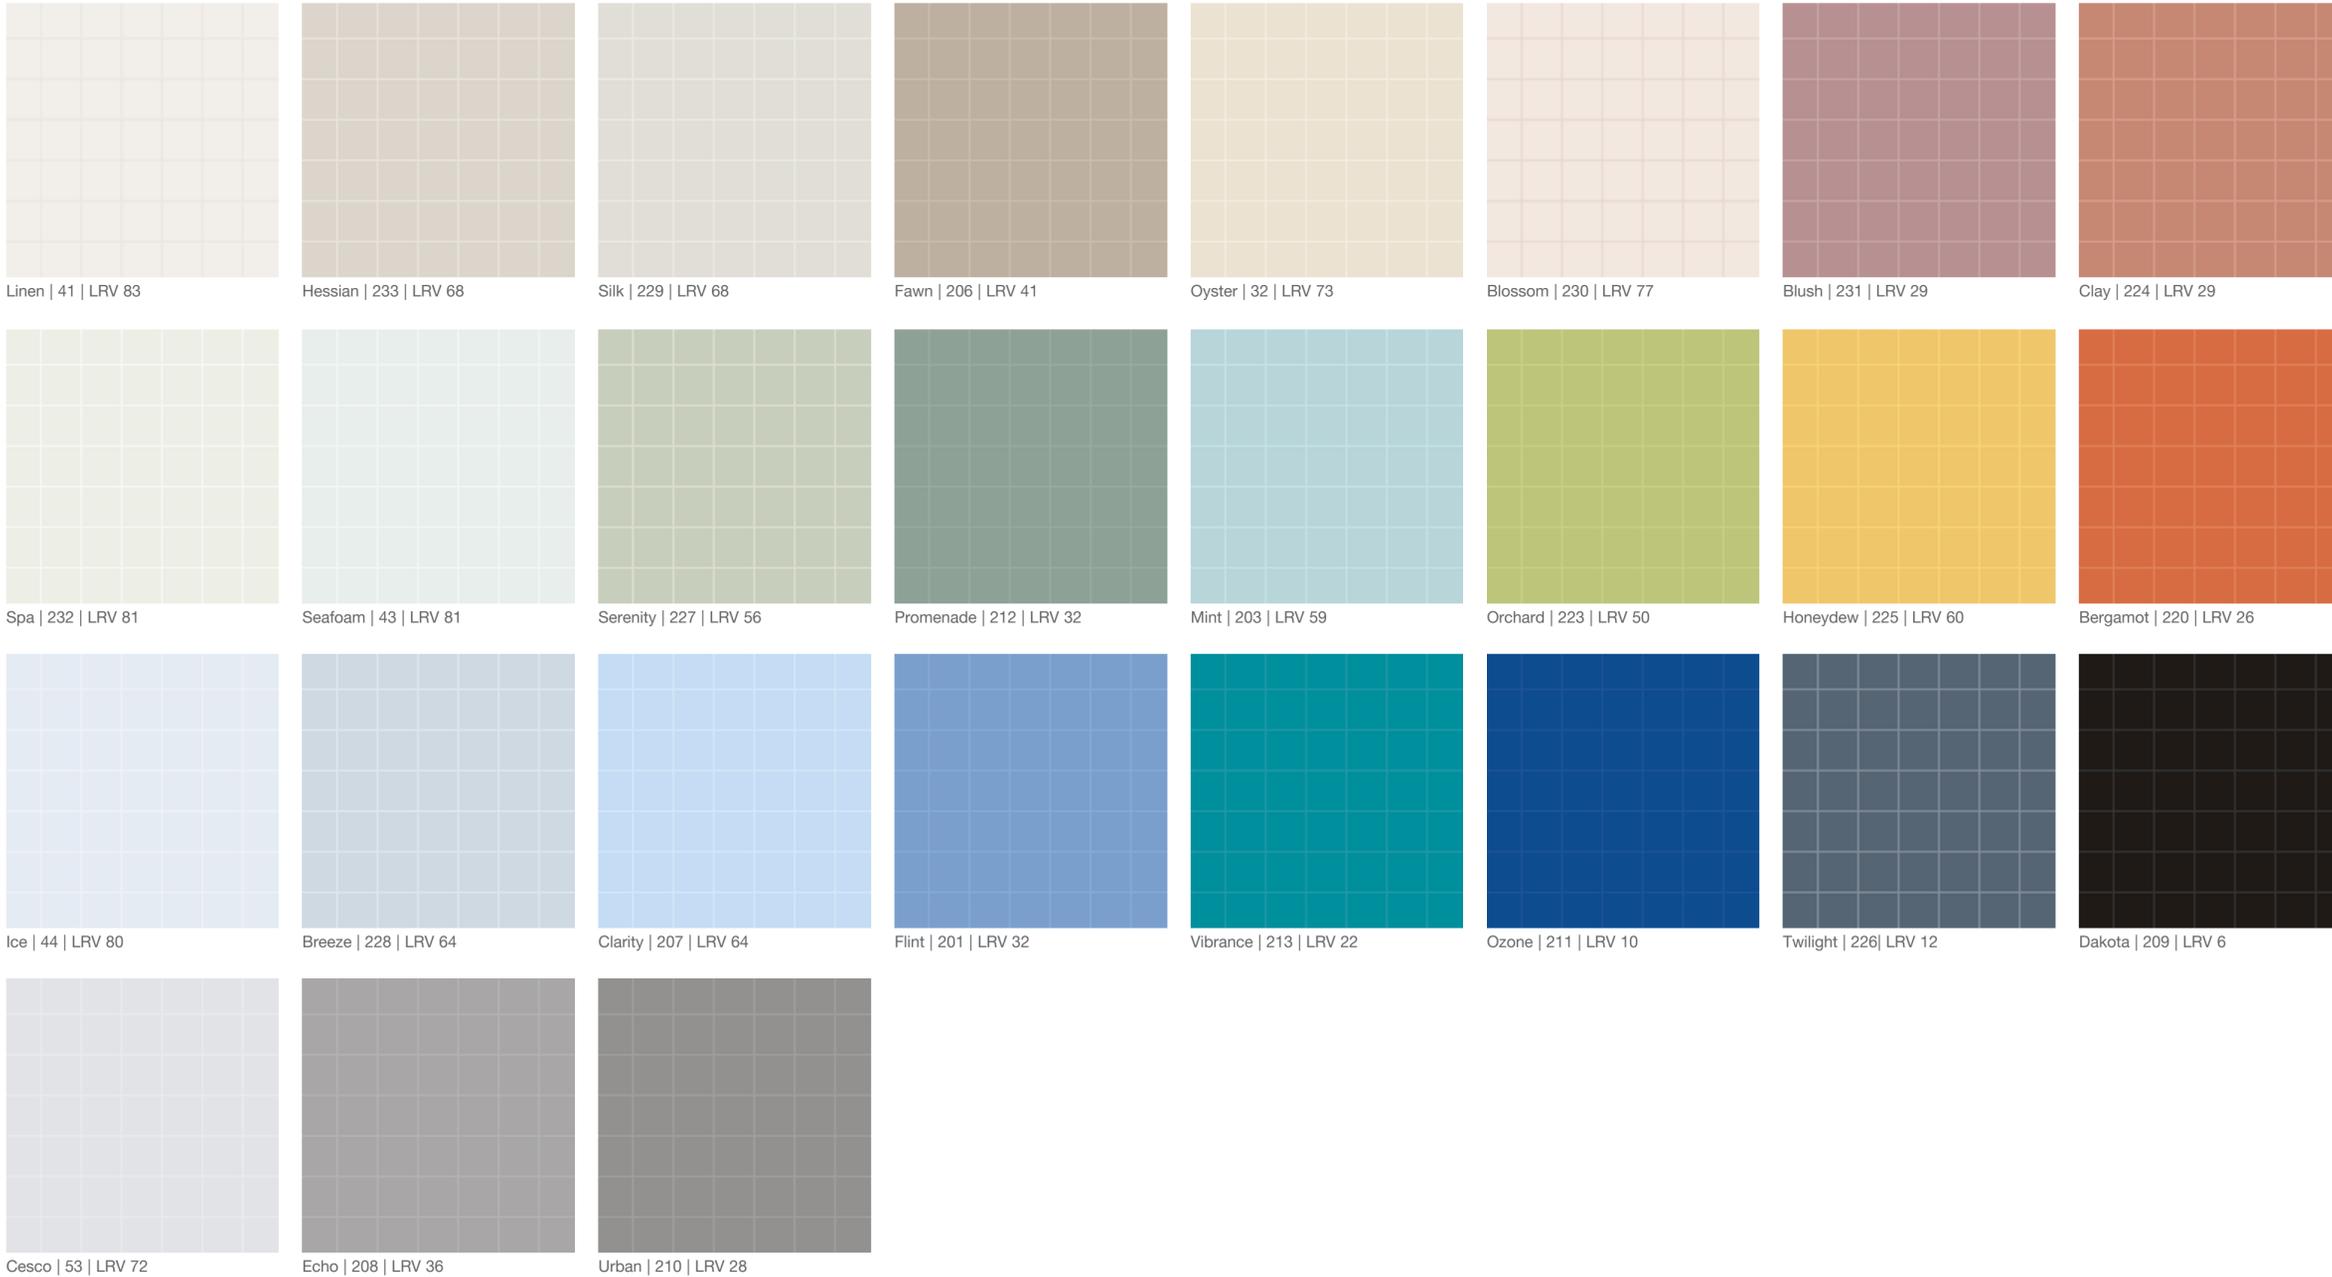Class 1b - satins



DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.




DSDC product accreditation

Altro Tegulis™


Metro | 76mm x 146mm

Class 1a - white



White | W103-W104 | LRV 89


Class 1b - wall designs



White Mineral | 9905 | LRV 61



Cool Mineral | 9906 | LRV 48



Soft Elegance | 9918 | LRV 54



White Woodgrain | 9915 | LRV 79

DSDC product accreditation rating key

class 1a

Finishes within this rating are plain and can be used indiscriminately.

That said, bear in mind the need to contrast flooring with walls, skirtings, doors / frames, furniture & sanitary ware.

Contrast is the key word.

We recommend a minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

Finishes within this rating are semi-plain (minimal texture or fleck / and or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.




DSDC product accreditation

Altro Tegulis™

Metro | 76mm x 146mm

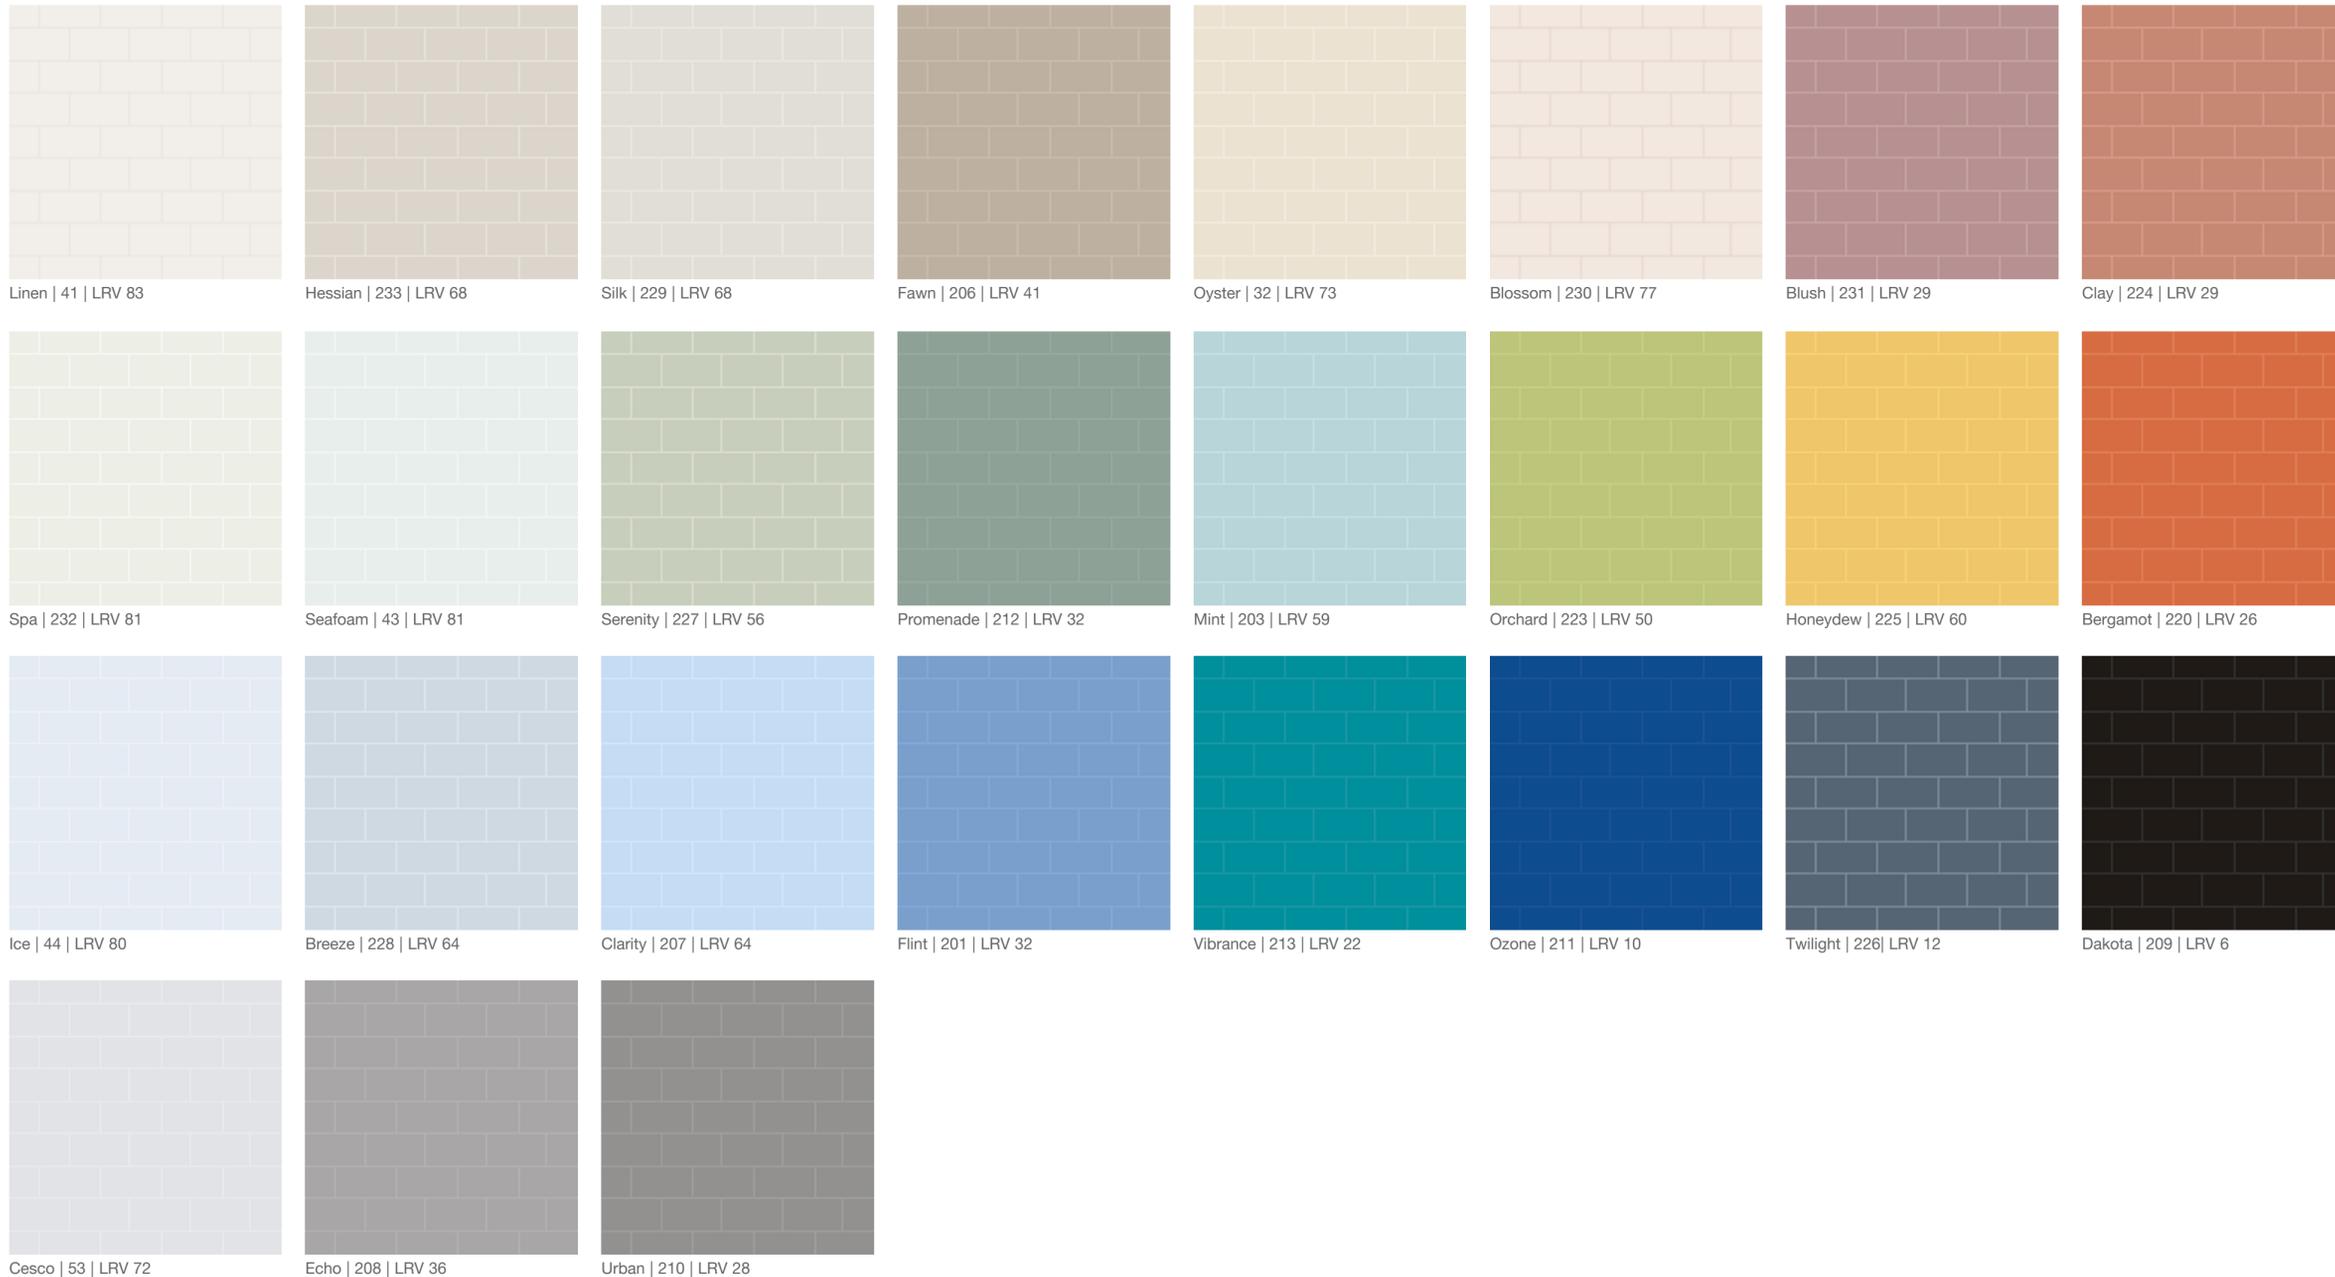Class 1b - satins



DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.



DSDC product accreditation

Altro Tegulis™


Metro | 76mm x 292mm

Class 1a - white



White | W103-W104 | LRV 89

Class 1b - wall designs



White Mineral | 9905 | LRV 61



Cool Mineral | 9906 | LRV 48



Soft Elegance | 9918 | LRV 54



White Woodgrain | 9915 | LRV 79

DSDC product accreditation rating key

class 1a

Finishes within this rating are plain and can be used indiscriminately.

That said, bear in mind the need to contrast flooring with walls, skirtings, doors / frames, furniture & sanitary ware.

Contrast is the key word.

We recommend a minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

Finishes within this rating are semi-plain (minimal texture or fleck / and or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.



DSDC product accreditation


Altro Tegulis™

Metro | 76mm x 292mm


Class 1b - satins




Linen | 41 | LRV 83




Hessian | 233 | LRV 68



Silk | 229 | LRV 68




Fawn | 206 | LRV 41




Oyster | 32 | LRV 73




Blossom | 230 | LRV 77




Blush | 231 | LRV 29




Clay | 224 | LRV 29




Spa | 232 | LRV 81




Seafoam | 43 | LRV 81




Serenity | 227 | LRV 56




Promenade | 212 | LRV 32




Mint | 203 | LRV 59




Orchard | 223 | LRV 50




Honeydew | 225 | LRV 60




Bergamot | 220 | LRV 26




Ice | 44 | LRV 80




Breeze | 228 | LRV 64



Clarity | 207 | LRV 64




Flint | 201 | LRV 32




Vibrance | 213 | LRV 22




Ozone | 211 | LRV 10




Twilight | 226 | LRV 12




Dakota | 209 | LRV 6



Cesco | 53 | LRV 72



Echo | 208 | LRV 36



Urban | 210 | LRV 28

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.



DSDC product accreditation

Altro Tegulis™

Metro | 102mm x 233mm

Class 1a - white



White | W103-W104 | LRV 89

Class 1b - wall designs



White Mineral | 9905 | LRV 61



Cool Mineral | 9906 | LRV 48



Soft Elegance | 9918 | LRV 54



White Woodgrain | 9915 | LRV 79

DSDC product accreditation rating key

class 1a

Finishes within this rating are plain and can be used indiscriminately.

That said, bear in mind the need to contrast flooring with walls, skirtings, doors / frames, furniture & sanitary ware.

Contrast is the key word.

We recommend a minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

Finishes within this rating are semi-plain (minimal texture or fleck / and or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.




DSDC product accreditation


Altro Tegulis™

Metro | 102mm x 233mm

Class 1b - satins




Linen | 41 | LRV 83




Hessian | 233 | LRV 68




Silk | 229 | LRV 68




Fawn | 206 | LRV 41




Oyster | 32 | LRV 73




Blossom | 230 | LRV 77




Blush | 231 | LRV 29




Clay | 224 | LRV 29




Spa | 232 | LRV 81




Seafoam | 43 | LRV 81




Serenity | 227 | LRV 56




Promenade | 212 | LRV 32




Mint | 203 | LRV 59




Orchard | 223 | LRV 50




Honeydew | 225 | LRV 60




Bergamot | 220 | LRV 26




Ice | 44 | LRV 80



Breeze | 228 | LRV 64



Clarity | 207 | LRV 64




Flint | 201 | LRV 32



Vibrance | 213 | LRV 22




Ozone | 211 | LRV 10




Twilight | 226 | LRV 12




Dakota | 209 | LRV 6



Cesco | 53 | LRV 72



Echo | 208 | LRV 36



Urban | 210 | LRV 28

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.




DSDC product accreditation

Altro Tegulis™


Stacked Metro | 76mm x 292mm

Class 1a - white




White | W103-W104 | LRV 89


Class 1b - wall designs




White Mineral | 9905 | LRV 61



Cool Mineral | 9906 | LRV 48



Soft Elegance | 9918 | LRV 54



White Woodgrain | 9915 | LRV 79

DSDC product accreditation rating key

class 1a

Finishes within this rating are plain and can be used indiscriminately.

That said, bear in mind the need to contrast flooring with walls, skirtings, doors / frames, furniture & sanitary ware.

Contrast is the key word.

We recommend a minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

Finishes within this rating are semi-plain (minimal texture or fleck / and or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.






























DSDC product accreditation

Altro Tegulis™

Stacked Metro | 76mm x 292mm

Class 1b - satins

 Linen 41 LRV 83	 Hessian 233 LRV 68	 Silk 229 LRV 68	 Fawn 206 LRV 41	 Oyster 32 LRV 73	 Blossom 230 LRV 77	 Blush 231 LRV 29	 Clay 224 LRV 29
 Spa 232 LRV 81	 Seafoam 43 LRV 81	 Serenity 227 LRV 56	 Promenade 212 LRV 32	 Mint 203 LRV 59	 Orchard 223 LRV 50	 Honeydew 225 LRV 60	 Bergamot 220 LRV 26
 Ice 44 LRV 80	 Breeze 228 LRV 64	 Clarity 207 LRV 64	 Flint 201 LRV 32	 Vibrance 213 LRV 22	 Ozone 211 LRV 10	 Twilight 226 LRV 12	 Dakota 209 LRV 6
 Cesco 53 LRV 72	 Echo 208 LRV 36	 Urban 210 LRV 28					

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.




DSDC product accreditation

Altro Tegulis™


Stacked Metro | 222mm x 389mm

Class 1a - white



White | W103-W104 | LRV 89


Class 1b - wall designs



White Mineral | 9905 | LRV 61



Cool Mineral | 9906 | LRV 48



Soft Elegance | 9918 | LRV 54



White Woodgrain | 9915 | LRV 79

DSDC product accreditation rating key

class 1a

Finishes within this rating are plain and can be used indiscriminately.

That said, bear in mind the need to contrast flooring with walls, skirtings, doors / frames, furniture & sanitary ware.

Contrast is the key word.

We recommend a minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

Finishes within this rating are semi-plain (minimal texture or fleck / and or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.




























DSDC product accreditation

Altro Tegulis™

Stacked Metro | 222mm x 389mm

Class 1b - satins

 Linen 41 LRV 83	 Hessian 233 LRV 68	 Silk 229 LRV 68	 Fawn 206 LRV 41	 Oyster 32 LRV 73	 Blossom 230 LRV 77	 Blush 231 LRV 29	 Clay 224 LRV 29
 Spa 232 LRV 81	 Seafoam 43 LRV 81	 Serenity 227 LRV 56	 Promenade 212 LRV 32	 Mint 203 LRV 59	 Orchard 223 LRV 50	 Honeydew 225 LRV 60	 Bergamot 220 LRV 26
 Ice 44 LRV 80	 Breeze 228 LRV 64	 Clarity 207 LRV 64	 Flint 201 LRV 32	 Vibrance 213 LRV 22	 Ozone 211 LRV 10	 Twilight 226 LRV 12	 Dakota 209 LRV 6
 Cesco 53 LRV 72	 Echo 208 LRV 36	 Urban 210 LRV 28					

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.




DSDC product accreditation

Altro Tegulis™

Stacked Metro | 292mm x 592mm

Class 1a - white



White | W103-W104 | LRV 89


Class 1b - wall designs



White Mineral | 9905 | LRV 61



Cool Mineral | 9906 | LRV 48



Soft Elegance | 9918 | LRV 54



White Woodgrain | 9915 | LRV 79

DSDC product accreditation rating key

class 1a

Finishes within this rating are plain and can be used indiscriminately.

That said, bear in mind the need to contrast flooring with walls, skirtings, doors / frames, furniture & sanitary ware.

Contrast is the key word.

We recommend a minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

Finishes within this rating are semi-plain (minimal texture or fleck / and or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.


























DSDC product accreditation

Altro Tegulis™

Stacked Metro | 292mm x 592mm

Class 1b - satins

 Linen 41 LRV 83	 Hessian 233 LRV 68	 Silk 229 LRV 68	 Fawn 206 LRV 41	 Oyster 32 LRV 73	 Blossom 230 LRV 77	 Blush 231 LRV 29	 Clay 224 LRV 29
 Spa 232 LRV 81	 Seafoam 43 LRV 81	 Serenity 227 LRV 56	 Promenade 212 LRV 32	 Mint 203 LRV 59	 Orchard 223 LRV 50	 Honeydew 225 LRV 60	 Bergamot 220 LRV 26
 Ice 44 LRV 80	 Breeze 228 LRV 64	 Clarity 207 LRV 64	 Flint 201 LRV 32	 Vibrance 213 LRV 22	 Ozone 211 LRV 10	 Twilight 226 LRV 12	 Dakota 209 LRV 6
 Cesco 53 LRV 72	 Echo 208 LRV 36	 Urban 210 LRV 28					

DSDC product accreditation rating key

class 1b

Natural patterns such as timber and stone may be used in most areas due to their familiarity but with a degree of caution.

Bear in mind minimum contrast of 30 units LRV (Light Reflectance Value) between the critical surfaces mentioned above.

The DSDC ratings shown are for guidance, other colours within this range are available for use, please contact us for any queries.