



altro

Designed for possibilities.
Made for people.

Altro Ollero[™] product datasheet

Recycled rubber tile flooring for commercial spaces

discover [altro.com](https://www.altro.com)

Altro Ollero

Altro Ollero is a versatile, durable and eco-friendly PVC-free rubber flooring solution designed to provide the look of more traditional commercial surfaces such as carpet, stone and even cork. Available in a range of colors with a mixture of solid, speckled, neutral and vibrant tones, these tiles are guaranteed not to curl, harden or crack over time. Their integrated impact and sound absorption properties can help reduce fatigue and excess noise in high traffic areas.

With no need for additional finishes or wax, Altro Ollero is easy to clean and maintain without the use of harsh chemicals, making it a cost efficient option for retail, education and recreational areas. These precision water-jet cut tiles are easy to install and come in a square-edge glue-down format or an adhesive-free interlocking format with four different thickness options.

Typical applications

Retail, leisure, fitness centers, sporting arenas, education, childcare, gymnasiums, museums, libraries, amusements centers

Features + benefits

- Easy-to-clean
- Reduces fatigue
- Impact and sound absorbing
- High SCOF values wet or dry
- Long life expectancy + 10 year warranty
- Guaranteed not to curl
- High traction and durability
- FloorScore Certified
- This product does not contain PFAs

Altro Ollero contains as much as 90% post-consumer recycled content. Manufactured locally using reclaimed SBR rubber found in commercial truck tires, this product is FloorScore certified for low VOCs.

Thickness

- **4mm** is great for general use with a fantastic cost-efficiency
- **8mm** increases comfort underfoot and is more suitable for sport and high traffic areas
- **10mm** offers further enhanced comfort and optimal ergonomic properties for long periods of standing. It is also fantastic for use with ski boots, cleats, and hockey skates
- **12mm** allows consistent intense demand to be subjected on the floor in areas like heavy-duty fitness centers and gyms

Formats

Available in both glue-down and adhesive-free formats.



Square tiles

38" x 38"

Glue-down installation



Interlocking tiles

37" x 37"

Adhesive-free installation

Please refer to below data to help read the SKU and availability of colors

Lunar
*12

This color code refers to the color only. For a complete SKU, you must add the color code to the end of the prefixes found below.

Square tiles

4mm: **OS4***

8mm: **OS8***

10mm: **OS10***

12mm: **OS12***

Interlocking tiles

8mm: **OL8***

10mm: **OL10***

12mm: **OL12***

This indicates what thickness and format is available for each color.



= thickness
S = square
L = interlocking

Prices vary based on thickness, format and color saturation.

varies
thick

37" / 38"
width

37" / 38"
length

tile
format



Prices vary based on thickness, format and color saturation.



Piazza
*10

- | | | | |
|----|-----|-----|-----|
| 4S | 8S | 10S | 12S |
| 8L | 10L | 12L | |



Arctic
*02

- | | | | |
|----|-----|-----|-----|
| 4S | 8S | 10S | 12S |
| 8L | 10L | 12L | |



Mineral
*19

- | | | | |
|----|-----|-----|-----|
| 4S | 8S | 10S | 12S |
| 8L | 10L | 12L | |



Ebony
*01

- | | | | |
|----|-----|-----|-----|
| 4S | 8S | 10S | 12S |
| 8L | 10L | 12L | |



Adobe
*20

- | | | | |
|----|-----|-----|-----|
| 4S | 8S | 10S | 12S |
| 8L | 10L | 12L | |



Canvas
*04

- | | | | |
|----|-----|-----|-----|
| 4S | 8S | 10S | 12S |
| 8L | 10L | 12L | |



Ore
*06

- | | | | |
|----|-----|-----|-----|
| 4S | 8S | 10S | 12S |
| 8L | 10L | 12L | |

Prices vary based on thickness, format and color saturation.




Kiln
*11

4S	8S	10S	12S
8L	10L	12L	




Lunar
*12

4S	8S	10S	12S
8L	10L	12L	

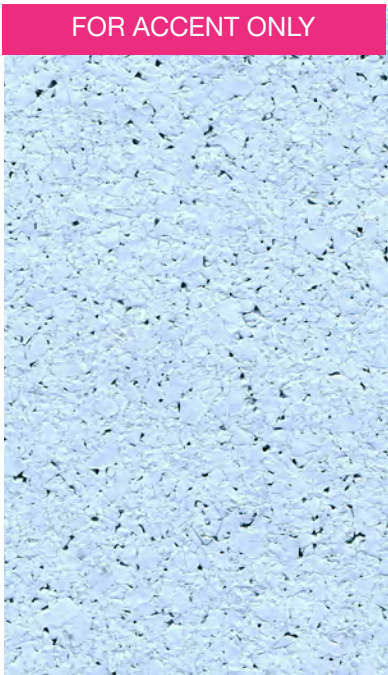

Aqua
*03

4S	8S	10S	12S
8L	10L	12L	

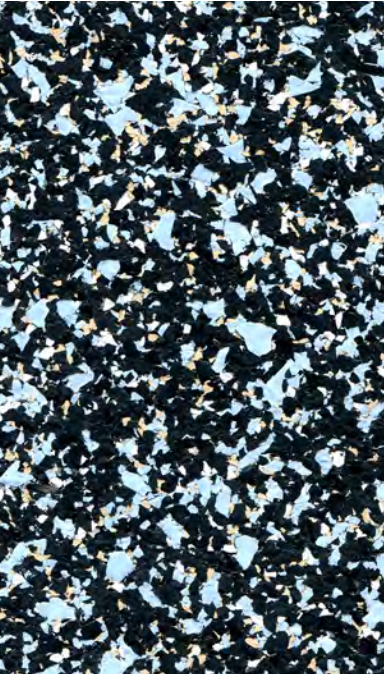


Tranquil
*16

4S	8S	10S	12S
8L	10L	12L	



Zen
*05

4S	8S	10S	12S
8L	10L	12L	

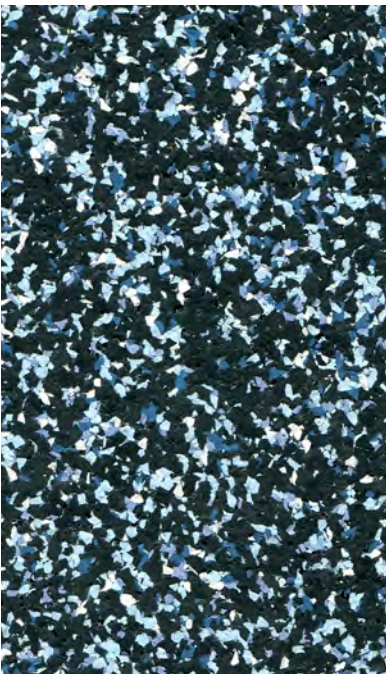


Zeal
*22

4S	8S	10S	12S
8L	10L	12L	



Oasis
*09


4S	8S	10S	12S
8L	10L	12L	

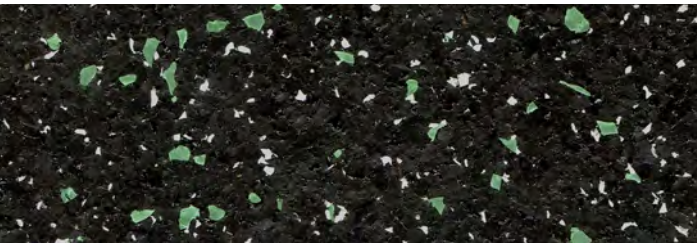

Serene
*07


4S	8S	10S	12S
8L	10L	12L	

Prices vary based on thickness, format and color saturation.

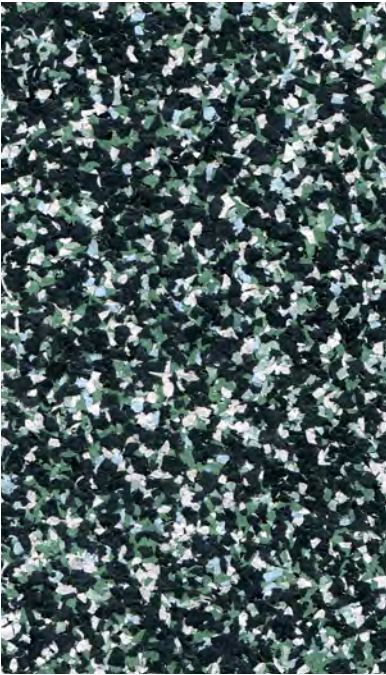


Electra
*18

4S	8S	10S	12S
8L	10L	12L	

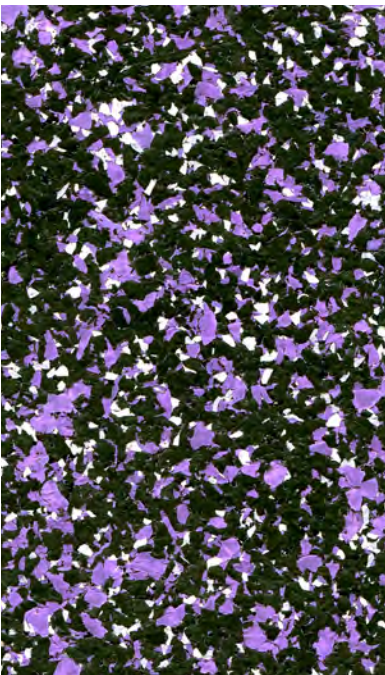


Aura
*21

4S	8S	10S	12S
8L	10L	12L	

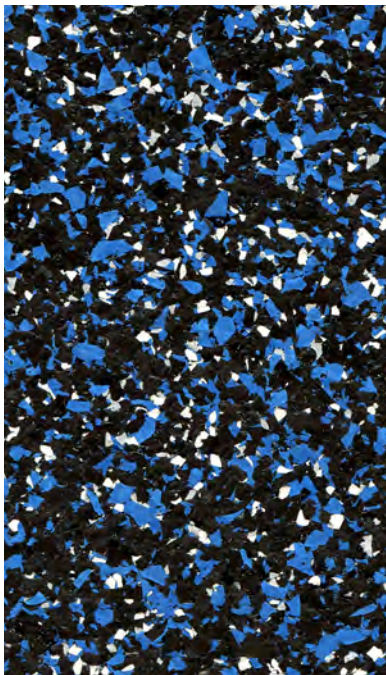


Wave
*14

4S	8S	10S	12S
8L	10L	12L	

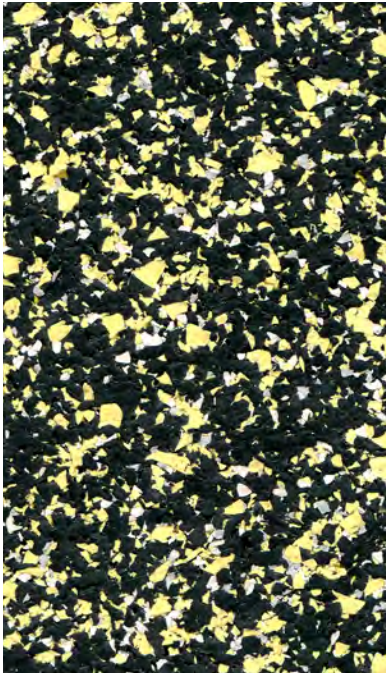

Astro
*17

4S	8S	10S	12S
8L	10L	12L	

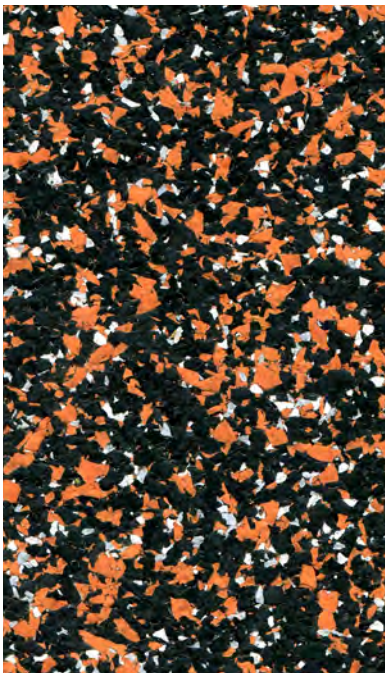

Pantile
*15

4S	8S	10S	12S
8L	10L	12L	



Flame
*13

4S	8S	10S	12S
8L	10L	12L	




Horizon
*08

4S	8S	10S	12S
8L	10L	12L	

Specifications			
Thickness and wear layer		4mm 4mm wear layer, homogeneous construction 8mm, 10mm, 12mm 4mm wear layer, heterogeneous construction	
Dimensions		38" x 38" square tiles, 37" x 37" interlocking tiles	
Effective coverage area		10 ft² per square tile, 9.5 ft² per interlocking tile	
Weight		Weight varies based on color saturation and thickness	
Warranty		10 years	
Life expectancy		4mm, 8mm - 10 years 10mm, 12mm - 12 years	
Static coefficient of friction		ASTM D2047	.85 dry, 1.01 wet
Static load limit		ASTM F970	1000 psi
Indentation		ASTM F1914-98	≤ 0.25" short term indentation ≤ 0.007" residual indentation
Flexibility		ASTM F137	Pass
Impact sound transmission		ASTM E492	4mm IIC 57 8mm + IIC 59
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
Fungi resistance		ASTM G21	Passes rating 0* *achieves zero growth after 28 days
Chemical resistance		ASTM F925	Tested
VOC emissions		ASTM D5116 FloorScore	Pass Certified
Recycled content		Contains up to 90% post-consumer recycled content.	
Composition	Combination of post-consumer recycled black SBR (styrene butadiene rubber), and/or EPDM (ethylene propylene diene monomer) rubber, and polyurethane binder.		
Backing	Compact rubber backing.		
Staining	Certain chemicals may cause staining of rubber flooring. Please conduct stain test before installation.		
Altro and Altro Ollero are all trademarks of Altro Limited. Content was correct at time of creation.			
Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.			
© Copyright Altro USA 2024			

LEED facts		 
LEED v4	This product may help contribute to the following credits	
Altro Ollero		3
 Materials and resources Contains recycled content		1
 Environmental quality Low emitting materials, flooring		1
 Environmental quality Low emitting materials, adhesives		1

Discover more of our sustainability story and credentials at altro.com

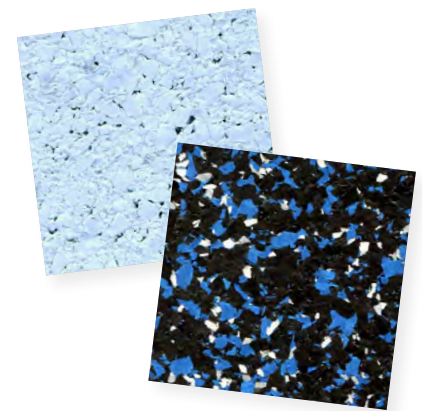

Order samples 24 hours a day at altro.com and materialbank.com

Due to the softness of 100% EPDM colors Arctic, Canvas, Zen and Aqua are recommended to be used as accent colors only.

Discover more online!



Maintenance guides




Illustrated guides



Warranty forms



Literature



LEED forms



Installation guides



Installation quickfacts

Even more great resources!

- BIM components
- CSI / CSC specifications
- SDS sheets
- Detail drawings and CAD files
- High-resolution swatch downloads
- Photo galleries - www.altropics.com
- Solutions by area type - ORs, labs and cleanrooms, kitchens, senior living and more!

Follow us



USA 800 377 5597

CANADA 800 565 4658

support@altro.com

www.altro.com

Content was correct at time of print. Altro reserves the right to change any detail. Please consult www.altro.com or your local Sales Representative for the latest product information.