

Altro Promenade

Designed for exterior use, Altro Promenade sheet vinyl flooring provides essential slip resistance in areas exposed year-round to changing weather conditions. This range is ideal for indoor applications as well as patios, decks and pool surrounds that prioritize both safety and aesthetic appeal.

Altro Promenade's impervious surface prevents rainwater and excess moisture accumulation that can damage subfloors over time. It is capable of enduring harsh sunlight and fluctuating temperatures without cracking, fading, or falling apart, making it a practical solution for outdoor areas.

In addition to its impressive durability, Altro Promenade offers a low-depth stepped embossing for smooth underfoot comfort and enhanced cleanability while still providing slip resistance.

Features + benefits

- Withstands outdoor conditions
- Durable
- Slip-resistant
- Enhanced cleanability
- Low-depth embossing
- Pillow emboss great for senior living
- Textured embossed colors great for pool surrounds – look for the pool icon for compatible SKUs
- FloorScore Certified / Low VOCs
- This product does not contain PFAs

Typical applications

Patios, decks, pool surrounds, spas, balconies, outdoor spaces

Slip resistance **SCOF**







It is designers, specifiers and end users' responsibility to ensure flooring is fit for purpose, and it's part of our role here at Altro to help make this process easy. Our flooring is separated into three categories: safety, slip-resistant and smooth.

Altro Promenade is slip-resistant flooring. It's a perfect choice for outdoor spaces which rain or water from pools may be present.



Four colors, designated with the swim icon, are recommended for pool surrounds where barefoot traffic is expected.














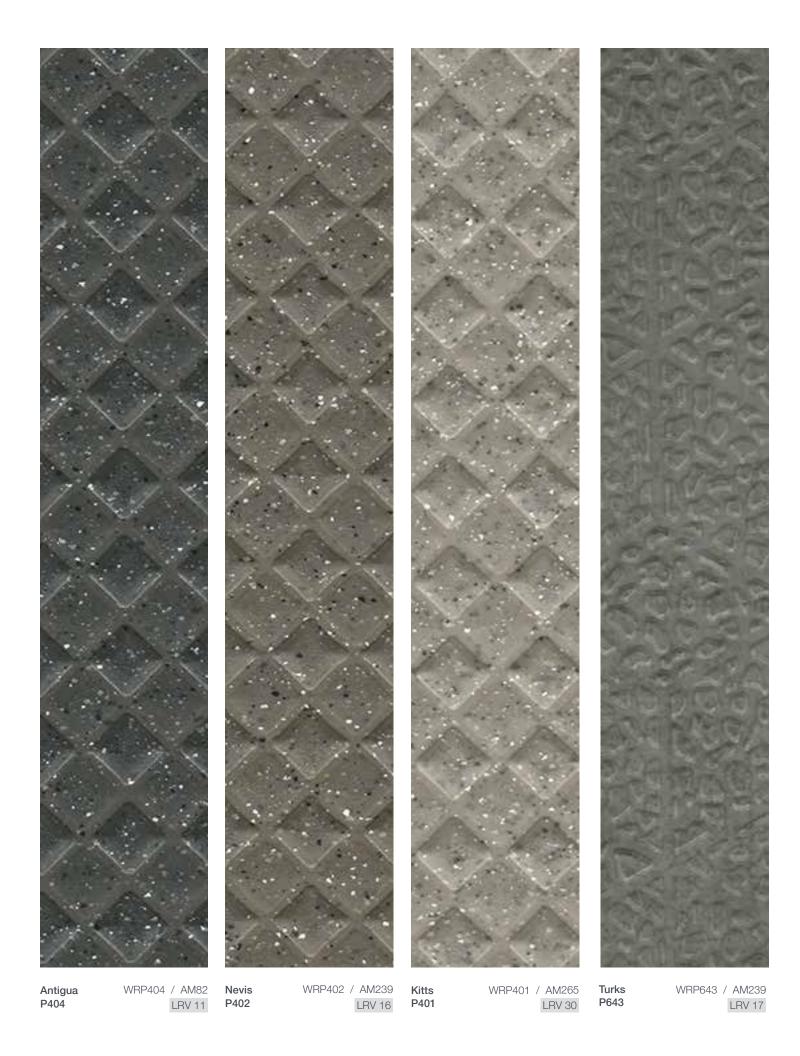







Type + class		ASTM F1303	Type II, Grade 1, Class C
Thickness		2.5mm .10", .7mm wear layer, heterogeneous construction	
Roll dimensions		5'11" x 32'9" 1.82m x 10m	
Roll weight		120 lbs 54.4 kg 120 lbs. per roll	
Warranty	10 year product warranty	10 years	
Life expectancy	12 year	12 years	
Static coefficient of friction	>.7D >.8W SCOF	ASTM D2047	Greater than .7 dry, greater than .8 wet
Dynamic coefficient of friction	.38 DCOF	ANSI/NFSI B101.3	.38 wet DCOF
Pendulum Test	PTV ≥45	ASTM E303	Greater than or equal to 45
Static load limit	Â	ASTM F970	1000 psi
Weathering and UV exposure	7	ASTM G155 ASTM D2565	Tested up to 2500 hours
Minimum operating temperature		-22°F (-30°C)	
Fire and smoke performance	8	CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
Chemical resistance		ASTM F925	Tested
Mold resistance	*	JIS Z 2911-2010	No growth detected after 4 weeks
VOC emissions	floor score	CA 01350 FloorScore	Pass Certified
Composition	PVC wear layer with compressed foam backing		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.		

Altro and Altro Promenade are trademarks of Altro Limited. Content was correct at time of creation. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information. © Copyright Altro USA 2025



Discover more of our sustainability story and credentials at altro.com





Order samples 24 hours a day at altro.com and materialbank.com

Discover more online!



Maintenance guides



Illus. cleaning guides



Warranty forms



Literature



LEED forms



Installation guides



Installation quickfacts

Even more great resources!

- BIM components
- Specifications
- SDS sheets
- Detail drawings and CAD files
- High-resolution swatch downloads
- Photo galleries www.altropics.com
- Solutions by area type ORs, labs and cleanrooms, kitchens, senior living and more!

Follow us



- **USA** 800 377 5597
- © CANADA 800 565 4658
- www.altro.com

Content was correct at time of print. Altro reserves the right to change any detail. Please consult www.altro.com or your local Sales Representative for the latest product information