




Designed for possibilities.
Made for people.

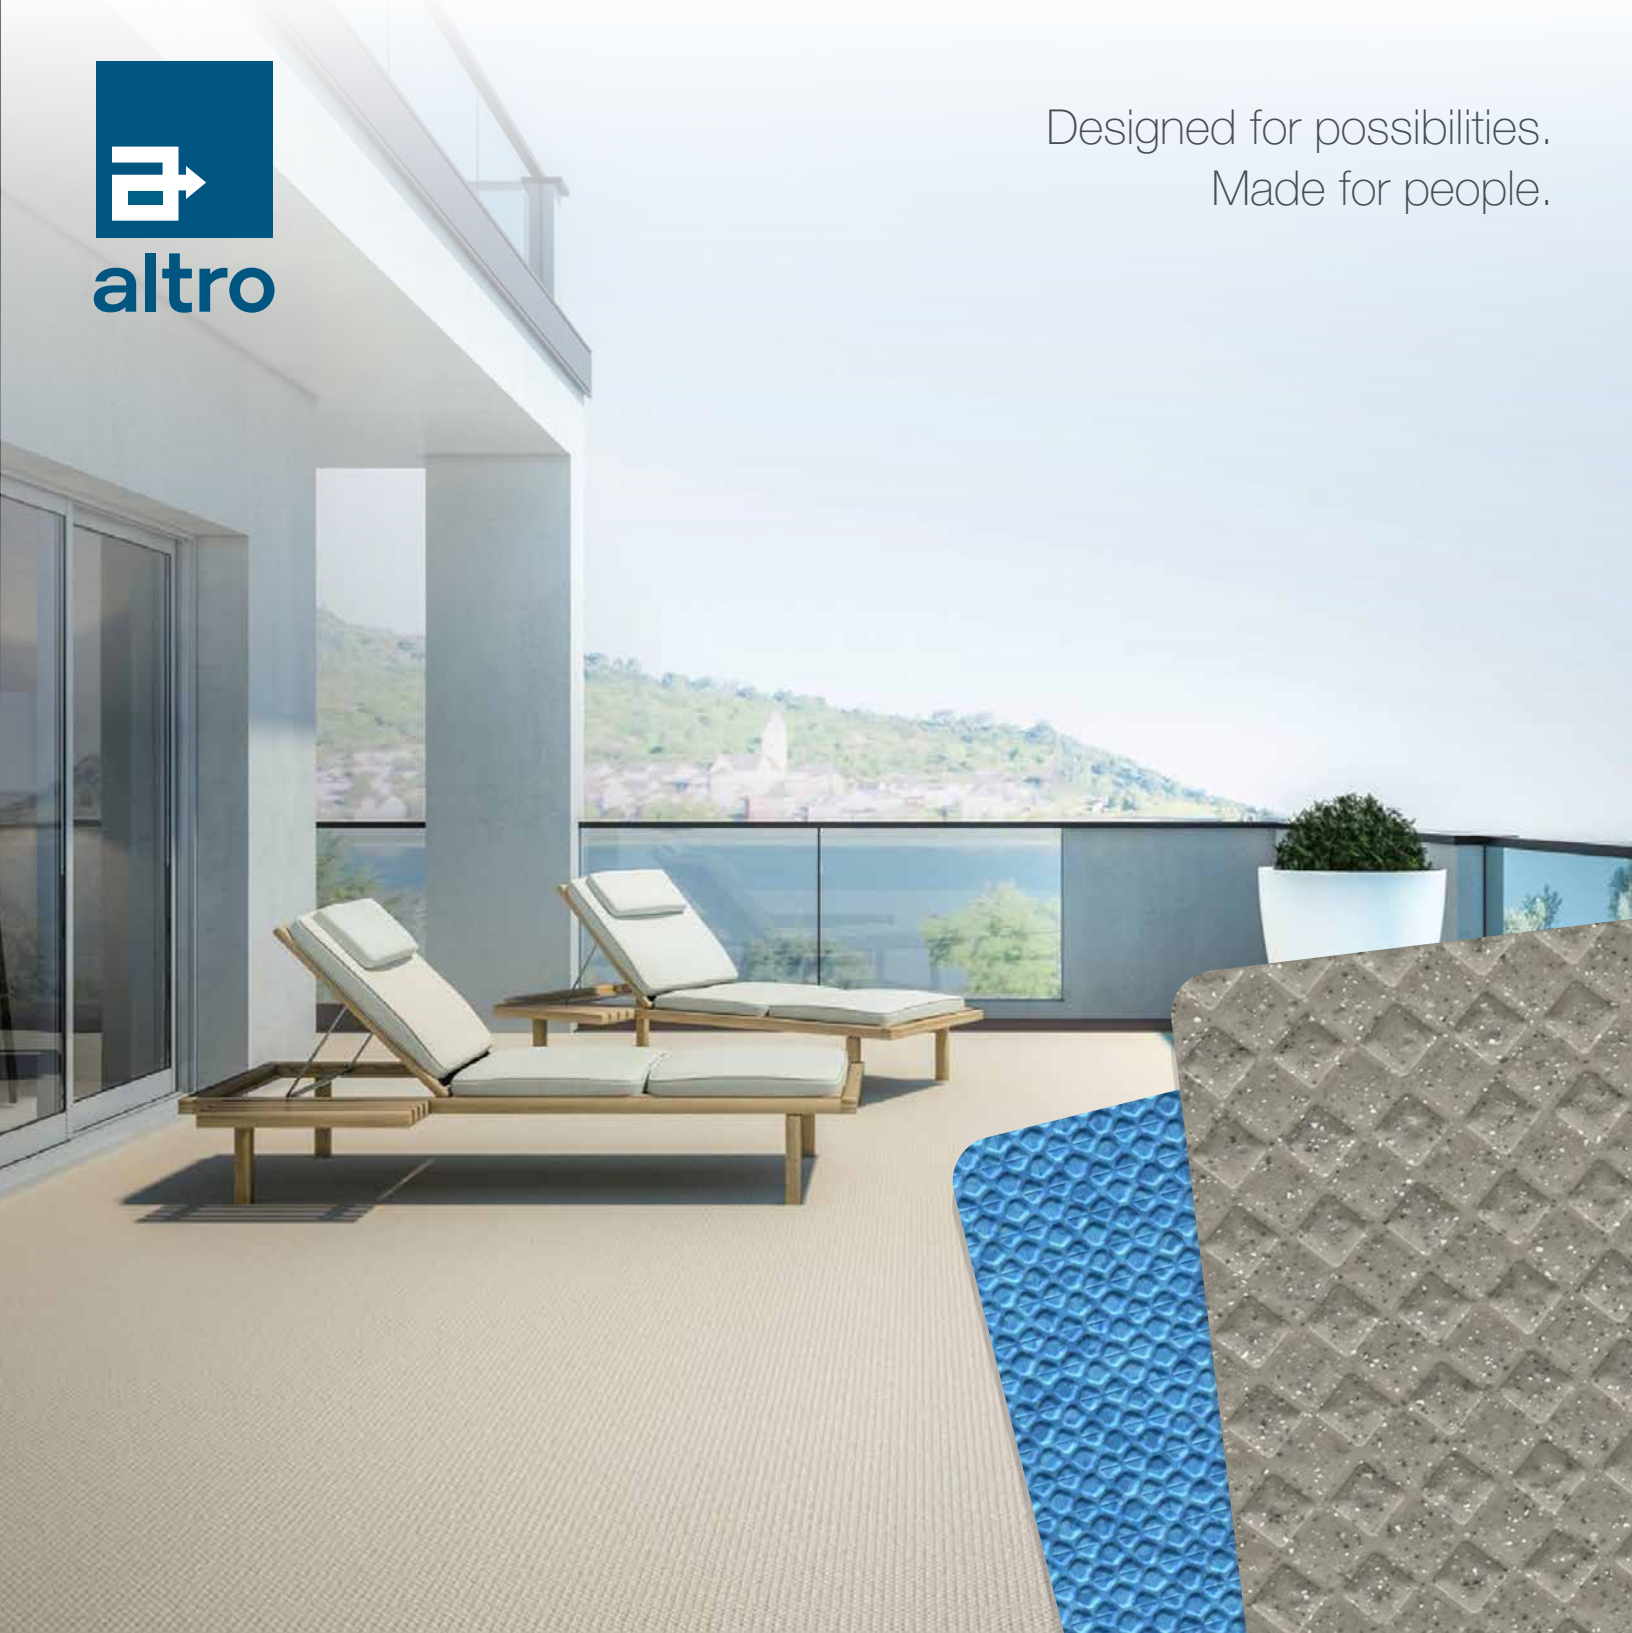

Altro Promenade™ product datasheet

Slip-resistant sheet flooring for outdoor spaces

Altro Promenade

Designed for exterior use, Altro Promenade sheet vinyl flooring provides essential slip resistance in areas exposed year-round to changing weather conditions. This range is ideal for indoor applications as well as patios, decks and pool surrounds that prioritize both safety and aesthetic appeal.

Altro Promenade's impervious surface prevents rainwater and excess moisture accumulation that can damage subfloors over time. It is capable of enduring harsh sunlight and fluctuating temperatures without cracking, fading, or falling apart, making it a practical solution for outdoor areas.

In addition to its impressive durability, Altro Promenade offers a low-depth stepped embossing for smooth underfoot comfort and enhanced cleanability while still providing slip resistance.

Features + benefits

- Withstands outdoor conditions
- Durable
- Slip-resistant
- Enhanced cleanability
- Low-depth embossing
- Pillow emboss great for senior living
- Textured embossed colors great for pool surrounds – look for the pool icon for compatible SKUs
- FloorScore Certified / Low VOCs
- This product does not contain PFAs

Typical applications

Patios, decks, pool surrounds, spas, balconies, outdoor spaces

Slip resistance



It is designers, specifiers and end users' responsibility to ensure flooring is fit for purpose, and it's part of our role here at Altro to help make this process easy. Our flooring is separated into three categories: safety, slip-resistant and smooth.

Altro Promenade is slip-resistant flooring. It's a perfect choice for outdoor spaces which rain or water from pools may be present.




Four colors, designated with the swim icon, are recommended for pool surrounds where barefoot traffic is expected.

2.5mm
thick

5'11"
width

32'9"
length


roll
format

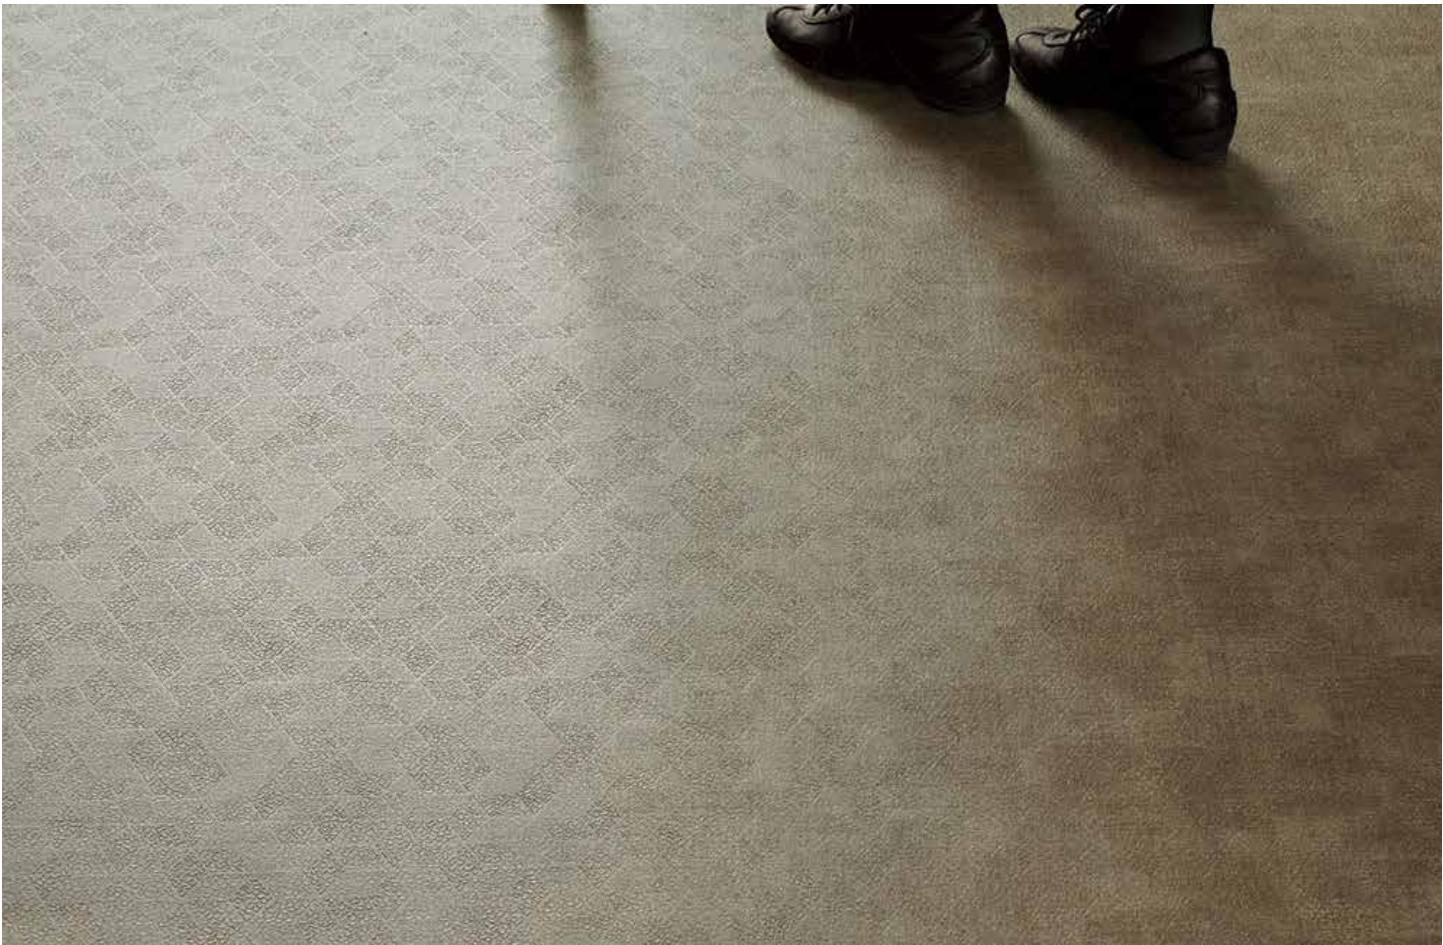



Antigua
P404

WRP404 / AM82
LRV 11

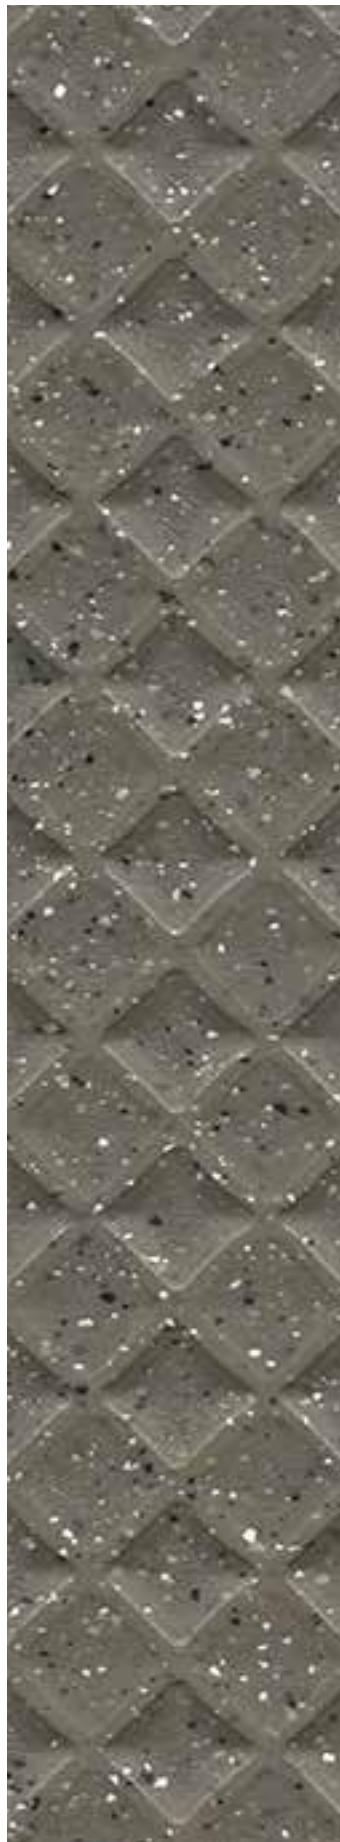

Nevis
P402

WRP402 / AM239
LRV 16



Kitts
P401

WRP401 / AM265
LRV 30



Turks
P643

WRP643 / AM239
LRV 17



**Barbuda
P640**

WRP640 / AM239
LRV 17




**Grenada
P642**

WRP642 / AM200
LRV 23




**Trinidad
P807**

WRP807 / AM200
LRV 51

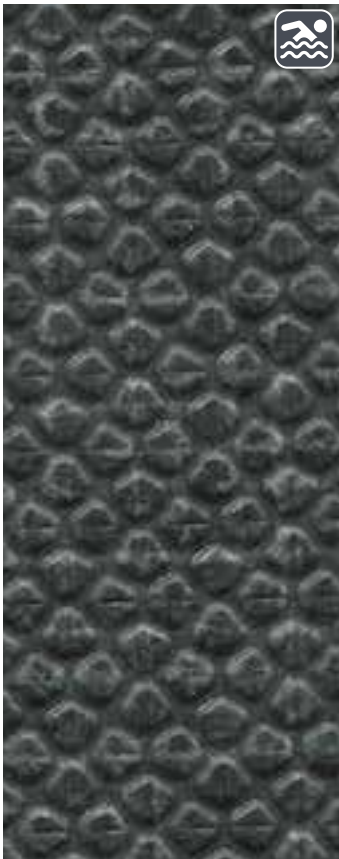

**Tobago
P603**

WRP603 / AM100
LRV 7

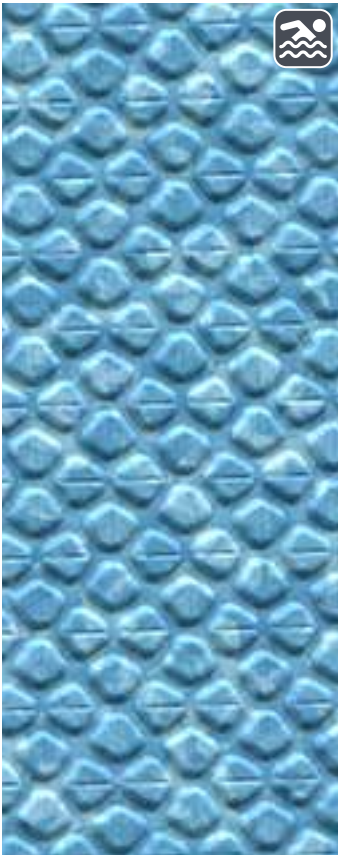


**Martinique
P801**

WRP801 / AM272
LRV 35



**Curacao
P802**

WRP802 / AM71
LRV 25

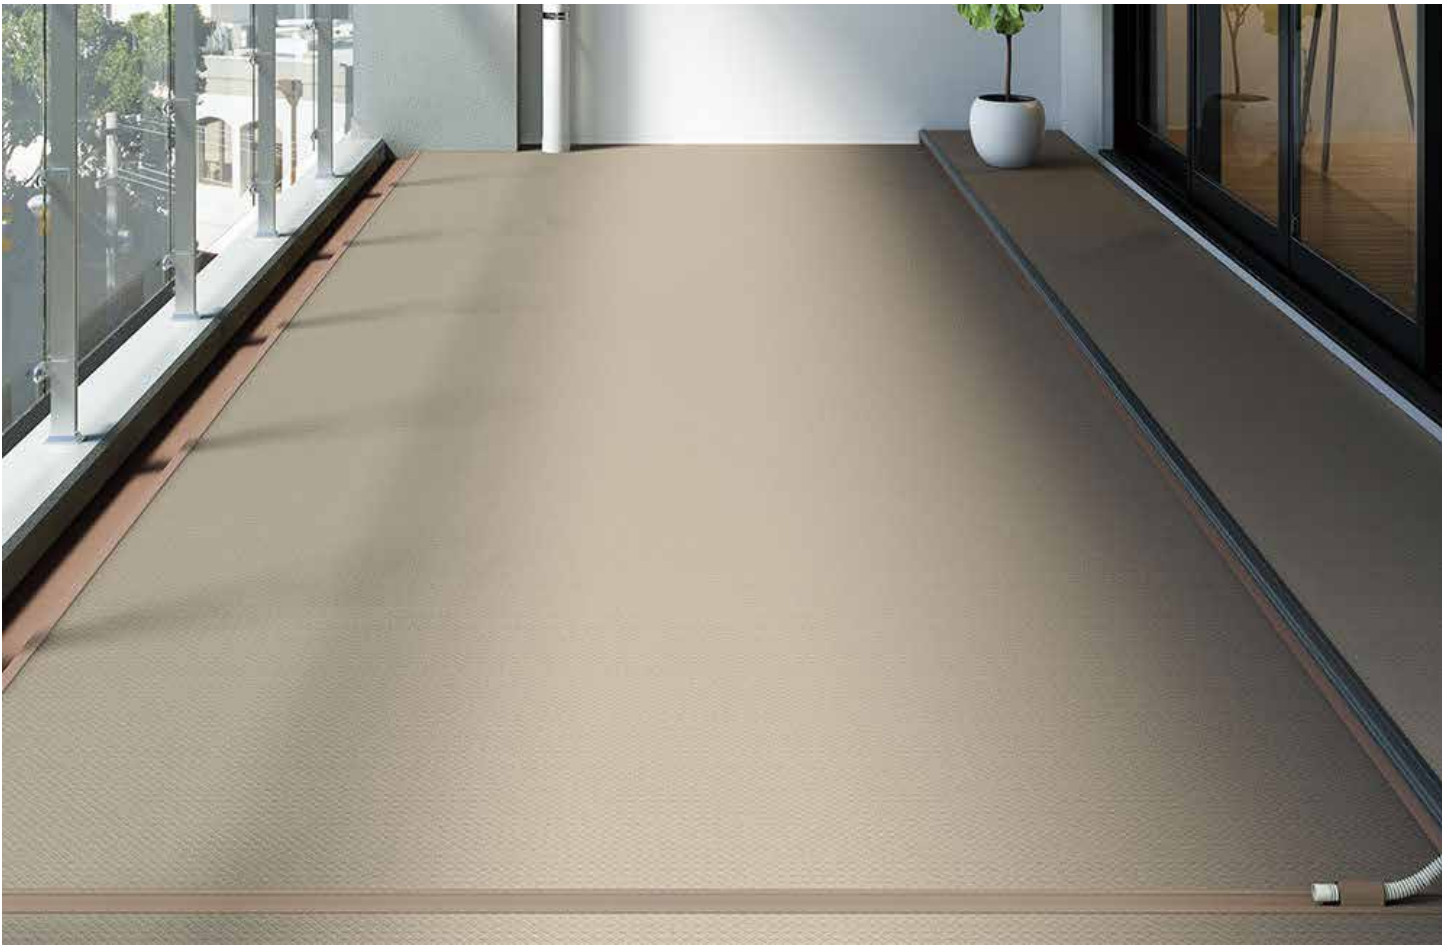

Type + class		ASTM F1303	Type II, Grade 1, Class C
Thickness		2.5mm .10", .7mm wear layer, heterogeneous construction	
Roll dimensions		5'11" x 32'9" 1.82m x 10m	
Roll weight		120 lbs 54.4 kg 120 lbs. per roll	
Warranty		10 years	
Life expectancy		12 years	
Static coefficient of friction		ASTM D2047	Greater than .7 dry, greater than .8 wet
Dynamic coefficient of friction		ANSI/NFSI B101.3	.38 wet DCOF
Pendulum Test		ASTM E303	Greater than or equal to 45
Static load limit		ASTM F970	1000 psi
Weathering and UV exposure		ASTM G155 ASTM D2565	Tested up to 2500 hours
Minimum operating temperature		-22°F (-30°C)	
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
Chemical resistance		ASTM F925	Tested
Mold resistance		ASTM D3273	Tested
Fungi resistance		ASTM G21	Tested
VOC emissions		CA 01350 FloorScore	Pass Certified
Composition	PVC wear layer with compressed foam backing		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.		

Altro and Altro Promenade are trademarks of Altro Limited. Content was correct at time of creation. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information. © Copyright Altro USA 2026

NOTE: Altro Promenade vinyl flooring is designed and intended to serve solely as a pedestrian surface finish installed over a properly constructed and code-compliant waterproofing or roof membrane system. It does not function as the weather barrier or primary roof covering within the roof assembly. The underlying membrane remains fully responsible for providing waterproofing, weather resistance, fire classification, and all other performance requirements of the roof covering. The Altro Promenade flooring layer is limited to providing a durable, slip-resistant, and decorative walking surface and does not alter or replace the performance characteristics of the roof system beneath.

LEED facts



LEED v5

This product may help contribute to the following credits

Altro Promenade

Low-emitting materials

Materials and resources, MRc3

Building product select and procurement

Materials and resources, MRc4


Discover more of our sustainability story and credentials at altro.com



material
bank

Order samples 24 hours a day at
altro.com and materialbank.com

Discover more online!



Maintenance guides




Illus. cleaning guides




Warranty forms



Literature



LEED forms



Installation guides



Installation quickfacts

Even more great resources!

- BIM components
- Specifications
- SDS sheets
- Detail drawings and CAD files
- High-resolution swatch downloads
- Photo galleries - www.altropics.com
- Solutions by area type - ORs, labs and cleanrooms, kitchens, senior living and more!

Follow us



 USA 800 377 5597

 **CANADA** 800 565 4658

 support@altro.com

 www.altro.com