


Altro Tegulis half-lap installation detail for BMH applications

updated 08/23/2022

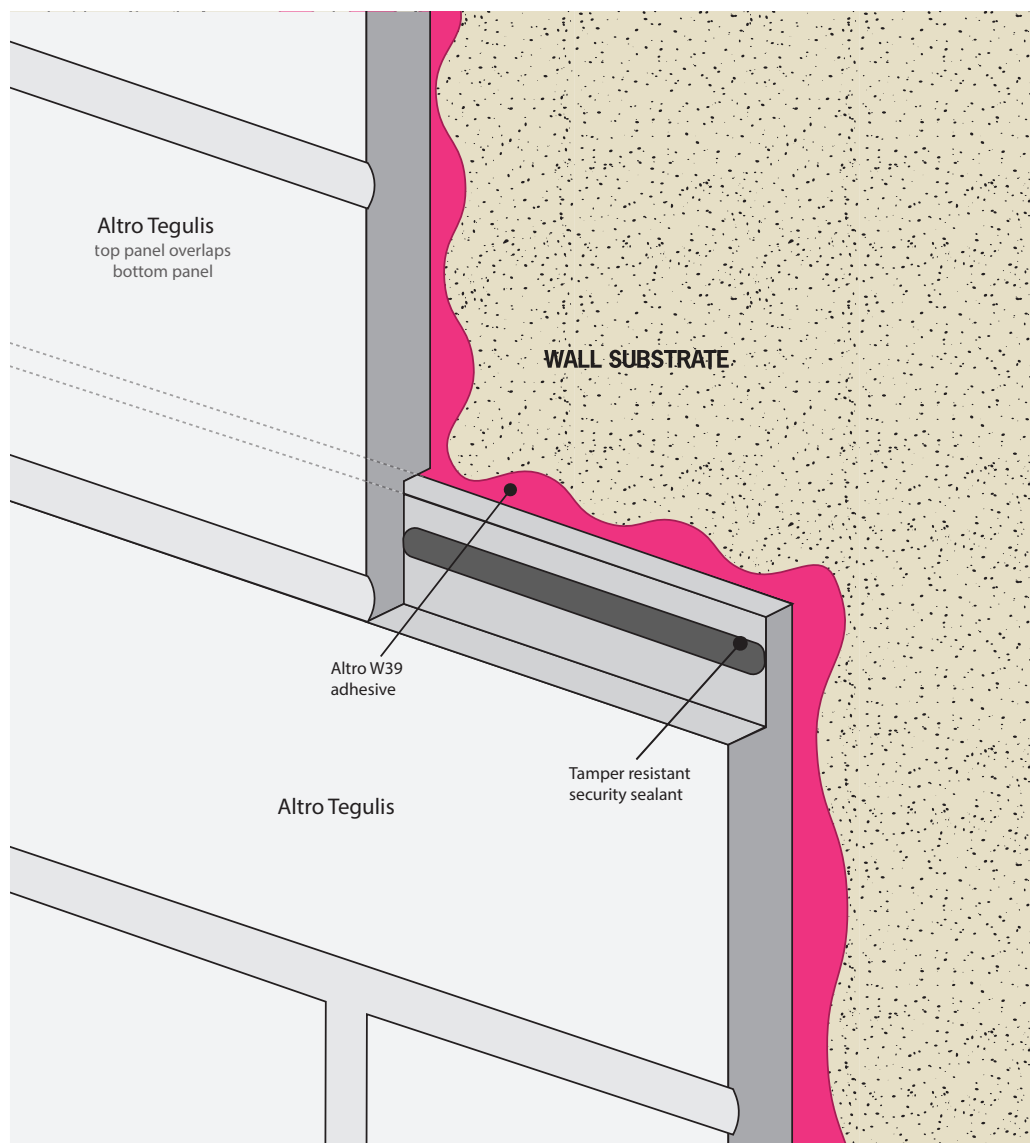

Apply an approximately 1/8" bead of tamper-resistant security sealant as shown in the detail diagram. Be sure to immediately clean up any excess sealing.

Follow the manufacturer's instructions in regards to application and cure times before the installation space is put into use.

There are several security sealants available on the market, the two listed below have been tested with Altro's products and perform well:

- Pecora Corporation Dynaflex SC
- BASF MasterSeal CR 195