



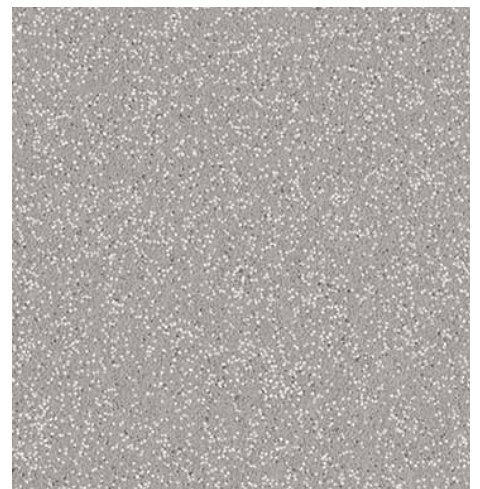

Designed for possibilities.
Made for people.

Altro Cantata™

Adhesive-free, smooth commercial flooring

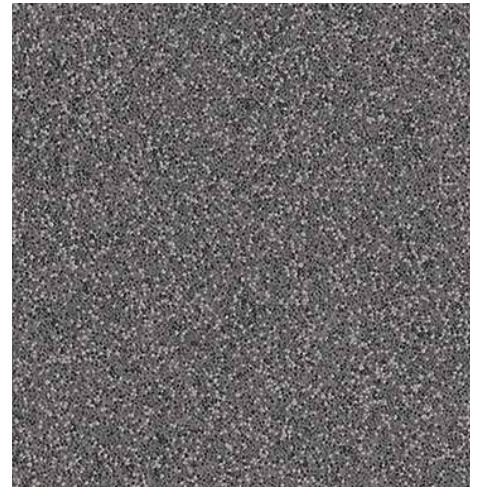

discover [altro.com](https://www.altro.com)


2.2mm
thick

6'7"
width


66'
length

sheet
format







Swan Lake CA2206
WR417 / AM417 LRV 13



Bridgadoon CA2210
WR389 / AM389 LRV 38




Butterfly CA2207
WR421 / AM421 LRV 31




Cabaret CA2205
WR391 / AM82 LRV 15



Carmen CA2214
WR420 / AM152 LRV 36



Carousel CA2208
WR416 / AM302 LRV 17



Chicago CA2203
WR390 / AM390 LRV 29



Cinderella CA2202
WR415 / AM415 LRV 47




Evita CA2209
WR385 / AM385 LRV 49



Firebird CA2215
WR393 / AM393 LRV 22



Jersey CA2213
WR419 / AM348 LRV 11



Midsummer CA2204
WR398 / AM398 LRV 25




Nutcracker CA2212
WR418 / AM239 LRV 23



Tosca CA2211
WR387 / AM387 LRV 32



West Side CA2201
WR388 / AM388 LRV 47



Wicked CA2216
WR399 / AM399 LRV 37

Specifications			
Type + class		ASTM F1303	Type II, Grade 1, Class B, smooth flooring
Thickness and wear layer		2.2mm .087" / .8mm wear layer, heterogeneous construction	
Roll dimensions		6'7" x 66' 2m x 20m	
Weight		4.79 lbs./yd ² 2.6 kg/m ²	
Warranty		10 years	
Cleaning technology		Altro Easyclean	
Static coefficient of friction		.7/.9	ASTM D2047
Ramp test		R10	DIN 51130
Static load limit		ASTM F970	2000 psi
Indentation		EN 433	≤ 0.10mm
Wear (abrasion) resistance		EN 660	≤ 10% 50,000 cycles
Castor chair abrasion		EN 425	Pass
Flexibility		ASTM F137	Pass
Light fastness		EN 20105-B02	≥ 6
Sound insulation		ISO 140-8	7dB
Electrical behaviors		EN 1815	≤ 2kV Antistatic
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
Chemical resistance		ASTM F925	Tested
VOC emissions		CA 01350 FloorScore	Pass Certified
Bio-based content		Manufactured with rapidly renewable bio-based content.	
Ortho-phthalate content		Ortho-phthalate-free	
Recycled content		This product contains 5% post-consumer recycled content.	
Composition	Heterogeneous PVC with glass fiber reinforcement scrim between the film print and backing. Altro Easyclean incorporated into top layer for exceptional cleanability.		
Backing	Embossed PVC backing.		
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads , training clinic information at altrofloors.com/training . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads . Failure to install, heat weld, and/or maintain correctly could void the warranty.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and oil-based products. Please consult our stain test kit for installation.		

LEED facts

LEED v4 This product may help contribute to the following credits

Altro Cantata **5**

- Materials and resources
Contains recycled content **1**
- Materials and resources
Renewable bio-based content **1**
- Materials and resources
Environmental product declaration **1**
- Materials and resources
Health product declaration **1**
- Environmental quality
Low emitting materials, flooring **1**

Discover more of our sustainability story and credentials at altro.com/sustainability

Follow us

