



**Designed for possibilities.
Made for people.**




altro.com

Altro Tegulis




Altro Tegulis


altro

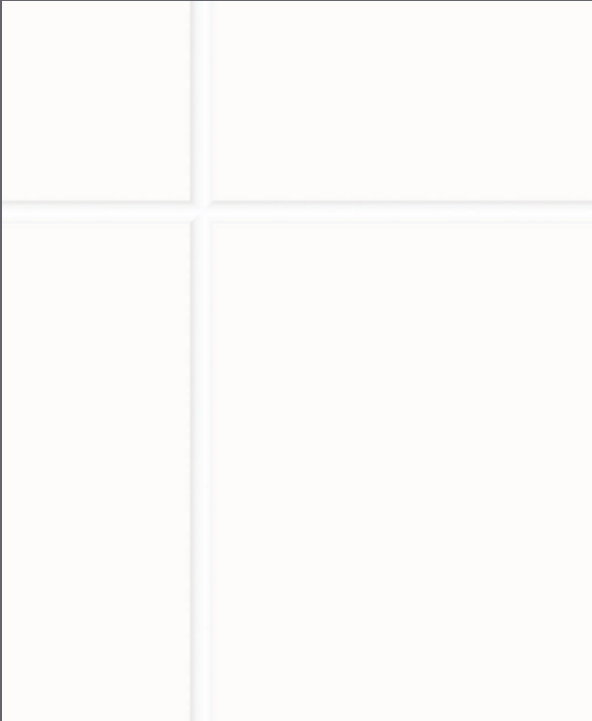


White | W103
LRV 89

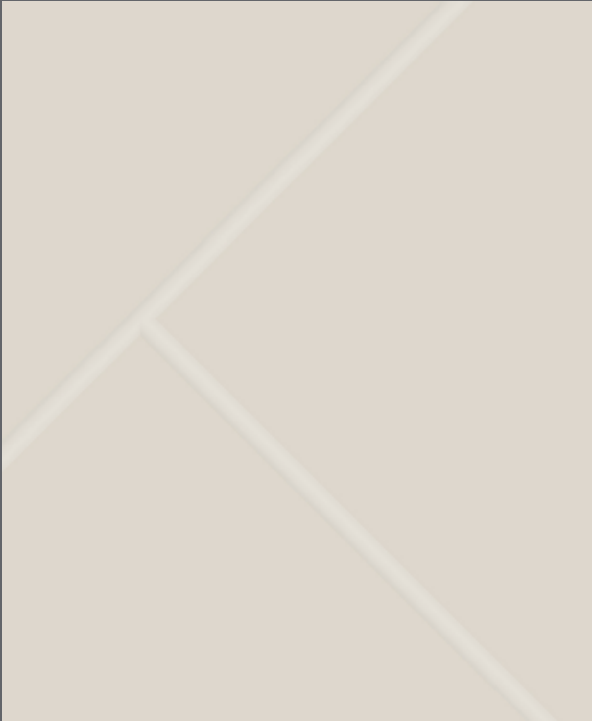

Hessian | 233
LRV 68

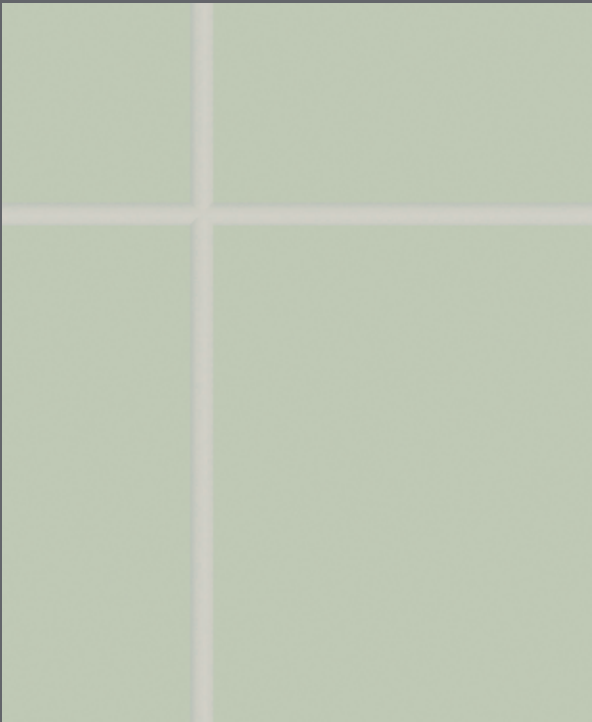

Serenity | 227
LRV 56

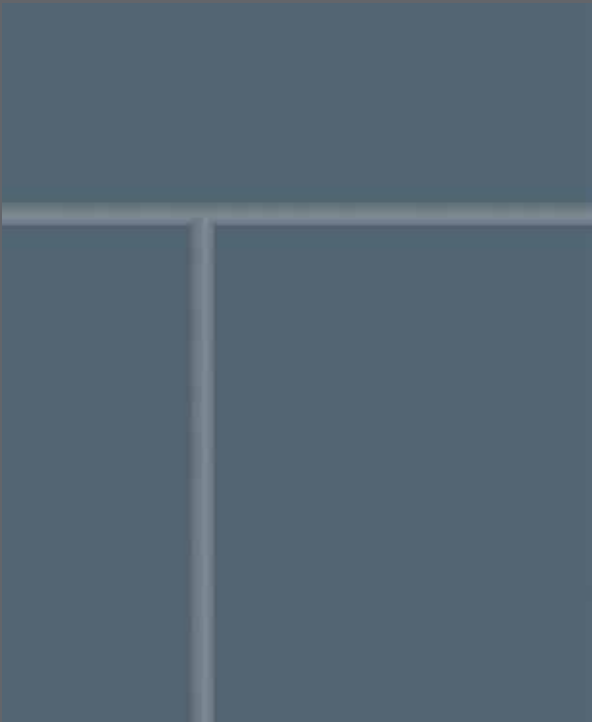

Twilight | 226
LRV 12

LRV = light reflectance value
Light reflectance values measured in accordance with BS 8493:2008.



altro

Altro Tegulis


Tile-effect wall panels



Warm Elegance | 9917
LRV 61



White Elegance | 9919
LRV 80

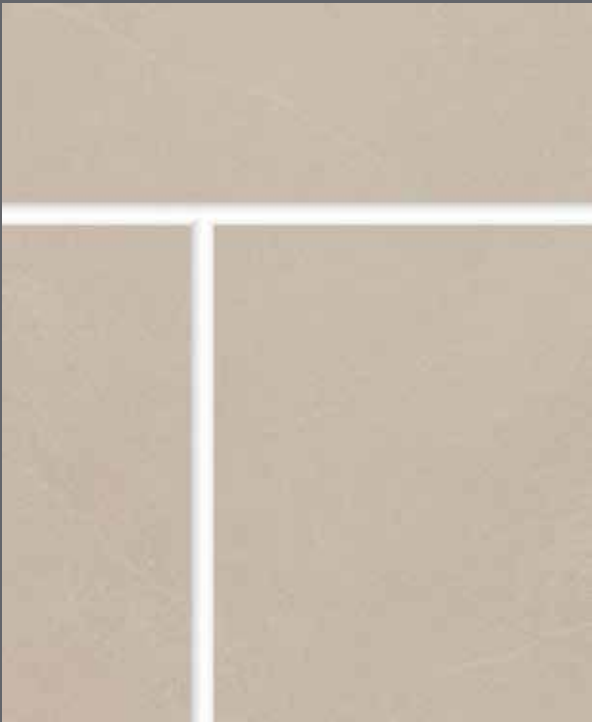

Soft Elegance | 9918
LRV 54



Warm Concrete | 9916
LRV 24



White Woodgrain | 9915

LRV 79




Soft Woodgrain | 9901

LRV 52



White Mineral | 9905


LRV 61

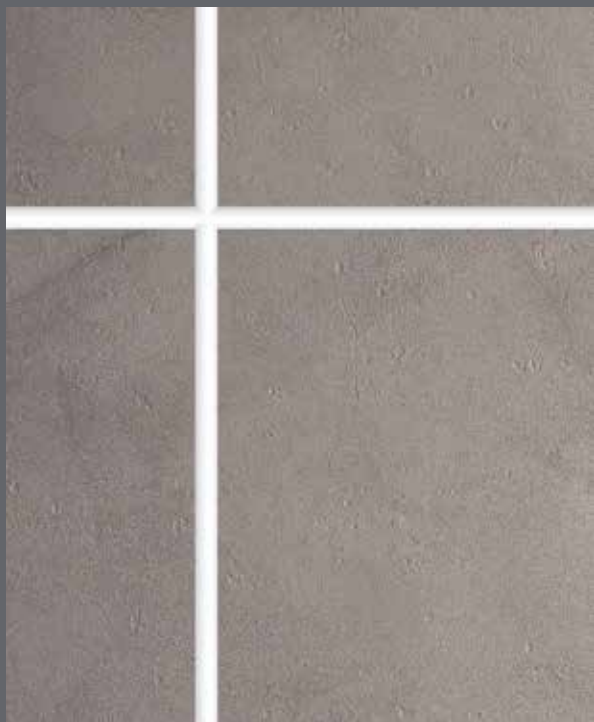

Urban Mineral | 9907

LRV 28

Altro Tegulis installation methods

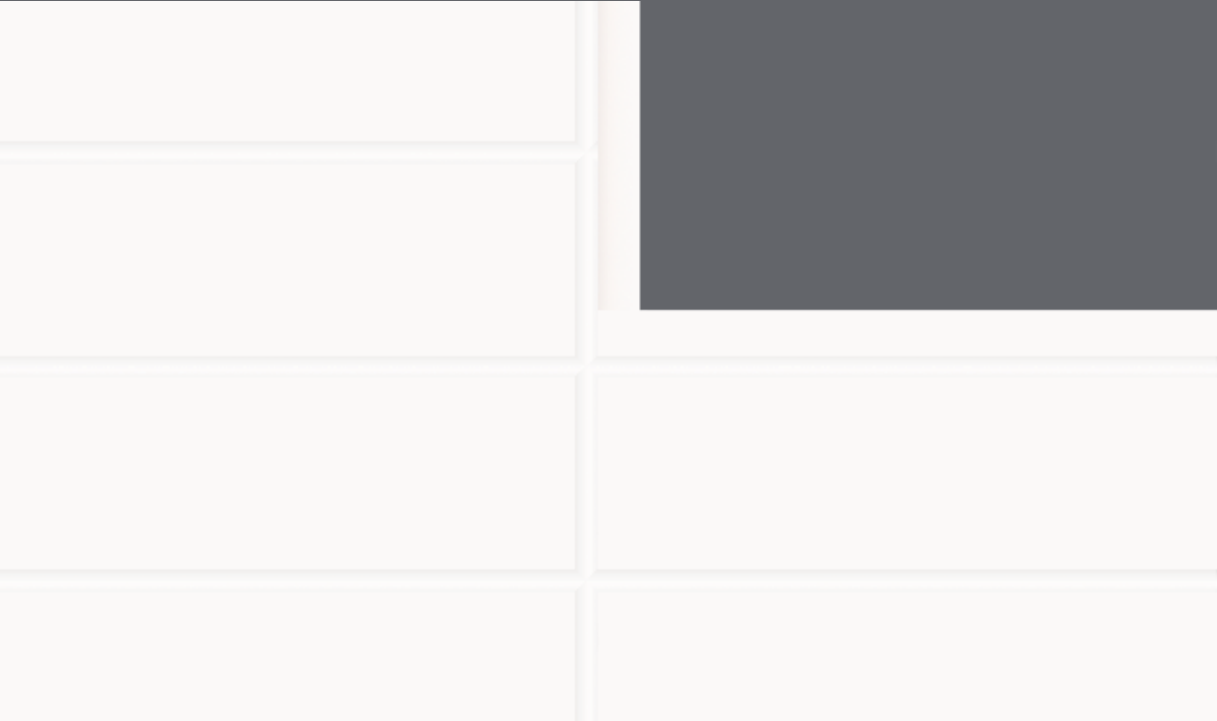

Half-lap - recommended for use in wet areas, half-lap panel edges are machined to fit on top of each other creating a smooth, water-resistant joint. Use Altro sanitary sealant for secure, watertight joints.



Interlocking - for use in dry environments, tiles form an easy, puzzle-like interlock, making the joint virtually invisible.







Typical applications

Bathrooms. Non-commercial kitchens. Supermarket counters. Bars, cafes, restaurants. Spas. Hotels.

Technical information

Surface finish	Satin	
Thickness	2.5 mm	
Size	Contact Altro for details	
Weight	3300 g/m² - 3600 g/m²	
Maximum service temperature	60°C	
E-modulus of elasticity	ISO 527	2980 MPa
Notched impact resistance	ISO 179/1ea	9.5 KJ/m²
Flexural strength	ISO 178	78 MPa
Tensile strength	ISO 527	53 MPa
Shore D hardness	ISO 868	76
Thermal conductivity- 'K Value'	EN 12524	0.17 W/mK
Water absorption	ISO 62	≤ 0.1%
Moisture vapour transmission rate (MVTR)	ASTM E96	≤ 0.12 g/m²/24h
Fire performance	EN 13501-1	B- s3, d0



Installation and maintenance

Please refer to Altro installation and maintenance instructions. Failure to follow these instructions can affect product performance and may affect or invalidate Altro's product guarantee. Technical information on installation and maintenance (including cleaning and staining) can be found at www.altro.com